

مواصفات وجداول وكميات مشروع تحديث وصيانة عيادة القدم السكرية

(الطابق الثاني)

البند	وصف العمل	الوحدة	الكمية	السعر الافرادي	السعر الاجمالي
1	الأعمال التحضيرية: 1. عزل الموقع المشمول بالعمل وذلك باستعمال بلاستيك مقوي أو جدران من الجبسوم بورد اذا اقتضى الأمر وذلك بناءً على تعليمات المهندس. 2. إزالة كافة المعوقات التي تحول دون تنفيذ المشروع في الموقع وتشمل:- أ. الأسقف المستعارة. ب. وحدات الانارة. ج. وحدات انذار حريق. د. التمديدات الصحية، وتشمل: - خطوط المياه/ خطوط الصرف الصحي - عزل المنطقة لفصل المياه وخلافه هـ. فك وإزالة الأبواب الخشبية وتسليمها لدائرة اللوازم. ويشمل العمل بهذا البند إزالة كافة المخلفات خارج الموقع وثم خارج المركز أولاً بأول. 3. هدم وإزالة الجدران التي تلتزم لتنفيذ المخطط وتنظيف الارضيات مكان الجدران التي تم هدمها ومهما كان ذلك التنفيذ المخطط المعد لهذا العمل وطرح الأنقاض أولاً بأول خارج المركز. 4. إزالة بلاط الجدران والارضيات القديم وذلك تمهيداً لأعمال البناء وتركيب البلاط الجديد. اعمال الطوب والقضارة:- 1. تقديم وبناء جدران من الطوب سمك 10 سم - 15 سم من الخرسانة خفيفة الوزن بقوة كسر مناسبة وذلك للتقسيمات الداخلية والقواطع وحيثما يلزم لتنفيذ المخطط مهما كان ولم يتم ذكره علماً بأنه	مقطوع مقطوع مقطوع مقطوع مقطوع متر مربع			

				سوف يكون في بعض الجدران فتحات حسب قياس أجهزة التعقيم وحسب الاقيسة على المخطط وما يتطلب ذلك من تركيب كشفات خرسانية ويشمل ذلك القموط والسلاحات. فوق الطوب وعرض 10-15 سم. 2. قصارة خشنة مكونة من الاسمنت والرمل حسب الأصول في الأماكن التي سوف يتم تركيب بلاط سيراميك فوقها. 3. قصارة ثلاثة وجوه حسب الوصف أعلاه مع الوجه الناعم وللجدران التي سوف لا يتم تركيب بلاط فوقها. أعمال البلاط: 1. تنظيف الجدران مكان البلاط القديم تمهيداً لتركيب البلاط الجديد ويشمل ذلك خلع العتبات ان وجدت. 2. توريد وتركيب بلاط ارضي بورسلان مانع للانزلاق قياس لا يقل عن 50 سم * 50 سم سماكة 6 مم منشأ أوروبي غربي نخب اول شاملاً كافة المواد واستعمال الروبة المناسبة من حيث اللون والمقاومة للعفن، تقدم عينات لاختيار القياس واللون يتم اعتمادها من المهندس. 3. توريد وتركيب بانيل سيراميك على كافة الجدران القائمة والجديدة بنفس لون البلاط المعتمد لأرضيات بارتفاع 10 سم شاملاً الترويب حسب الأصول. 4. توريد وتركيب بلاط جدران سيراميك قياس مناسب يتم اعتماده من حيث القياس واللون من قبل المهندسين سماكة 6 مم منشأ أوروبي غربي نخب اول شاملاً الروبة المناسبة والمقاومة للعفن تقدم عينات لاختيار اللون والنوعية شاملاً كافة المواد. أعمال الاسقف المستعارة: 1. توريد وتركيب أسقف مستعارة معدنية ملابس طبقة جلدية او المنيوم مدهون
	متر مربع	225		
	متر مربع	150		
	مقطع			
	متر مربع	130		
	م.ط	120		
	متر مربع	350		
	متر مربع	135		

		100	متر مربع	حرارياً (Skin Plated) لون ابيض قياس 60 سم * 60 سم يتم تقديم عينة لاعتمادها من قبل المهندس والتعليق بواسطة سالك مجلفن قطر 2 مم بطريقة التعليق المناسبة. 2. توريد وتركيب أسقف ثانوية قياس 60 سم X 60 سم مع التعليق المناسب تقدم عينات للموافقة عليها. اعمال السباكة والصرف الصحي: - الوحدة الصحية: توريد وتركيب طقم حمام مكون من مرحاض فرنجي ومغسلة معلقة نوع أوروبي مع كافة التمديدات الصحية اللازمة لتشغيل الوحدة وخلط مناسب أوروبي غربي ويشمل السعر توريد كافة مكونات النيجارا والشطاف ومحابس الزاوية وبرابيش الوصل نوع جيد يوافق عليه ويشمل السعر كافة التوصيلات اللازمة مع شبكة المياه الباردة الساخنة وخطوط الصرف الصحي والمصرف الأرضي الستانلس ستيل قياس 20 سم * 20 سم والتوصيل مع الشبكة في المركز وتشغيل الوحدة مهما كان الامر. - اعمال الشبائيك: توريد وتركيب شبائيك المنيوم سحاب ذات مقطع مناسب من شركات (معتبرة) والزجاج شفاف او مغشى حسب الطلب سمك الزجاج 6 مم ويشمل العمل تركيب رخام 4 سم مناسب أسفل الشباك وبسمك الجدران. اعمال المنجور:- - الأبواب الخشبية: 1. توريد وتركيب حلق وأبواب معدني من الصاج المدهون والمعالج حرارياً وبما لا يقل 1.5 مم وبعرض الجدار الذي
		6 مم ²	متر مربع	
		9	عدد	

			سوف يركب عليه وحسب الاقيسة على المخطط ويثبت بواسطة براغي حسب الأصول. 2. توريد وتركيب أبواب مصنوعة من الخشب المضغوط والحشوات الداخلية خشب ابيض 3.5 سم واطار مصنوع من الزان ملبسة فورمايكا لكامل الباب على الوجهين حسب لون يتم اختياره والسعر يشمل الغالات وسلندر من اجود الصناعة الأوروبية والأيادي عادية (ليست كورية) شاملاً الفصالات وكافة المواد اللازمة تقدم عينة للزرافيل والاكسسوارات يتم اخذ الموافقة عليها ويكون السعر للباب حسب القياس على المخططات. 3. توريد وتركيب حماية للأبواب Skirting من أسفل الستانلس ستيل بارتفاع لا يقل عن 30 سم من الداخل والخارج تثبت حسب الأصول. <u>غرفة أجهزة التعقيم:</u> أولاً: غرفة المواد الغير نظيفة (Dirty Area): 1- خط تصريف (Drain) قيام 3" معدني (Cast Iron) يتحمل حرارة 93°. 2- خط مياه (Soft) سوفتتر ¾" شاملاً محبس + منظم. 3- خط مياه (RO) ¾" شاملاً محبس + منظم. 4- خط مياه (Soft) ¾" لتركيب (Water gun) شاملاً محبس + منظم. 5- خط هواء ¾" لتركيب (Air gun) شاملاً محبس + منظم. 6- خط هواء مضغوط ¾" شاملاً محبس + منظم.	
--	--	--	---	--

			7- خط Vent ¾" (Exhaust Air) حسب مواصفات الشركة. ثانياً: غرفة أجهزة التعقيم. 1- خط تصريف لكل جهاز 3" معدني يتحمل حرارة 134⁰ (Cast Iron). 2- خط مياه السوفتنر (Soft) قياس ¾" لكل جهاز تعقيم شاملاً محبس + منظم. 3- خط مياه RO قياس ¾" لكل جهاز شاملاً محبس + منظم. 4- خط هواء مضغوط ¾" شاملاً محبس + منظم لكل جهاز. <u>* هام: أي عدم توصيلها مع شبكة الصرف الصحي في الموقع او القائمة في المركز نظراً لارتفاع درجة حرارة المياه الى (54⁰).</u> ثالثاً: أجهزة التعقيم والغسالة: 1- تركيب وحدة Compressed Air لتغطي احتياجات جهازي (التعقيم والغسالة كما ورد في مواصفات الشركة الصانعة للأجهزة (شركة مجموعة الوافي) والمرفقة. 2- تركيب وحدة (Softener) لتغطي احتياجات أجهزة التعقيم والغسالة وذلك حسب المواصفات المرفقة من وكيل الشركة الصانعة (شركة مجموعة الوافي) والمرفقة. 3- تركيب وحدة (RO) لتغطي أجهزة التعقيم والغسالة وذلك حسب المواصفات المرفقة من وكيل الشركة الصانعة (شركة مجموعة الوافي) والمرفقة.	
--	--	--	---	--

				مواصفات جهاز ال Softener & OR: A: - High Quality System Consist of: 1- Feeding Pump. 2- Automatic Sand Filter. 3- Carbon Filter. 4- Softener Duplex. 5- Reverse Osmosis System. 6- Collection tank capacity of 1000L. 7- circulation Pump. 8- Mixed Bed. B: - Capacity of the system 3000 Gallons/ Day approx or more, and depend on all machines capacity. C: - To feed the steam generator of the steam sterilizer & washer disinfectors for the final rains stage. * هام: 6. تغذية الأجهزة بالكهرباء قدرة KW50 للجهاز الحجم الكبير قدرة KW35 للجهاز الحجم الصغير. الوحدة الصحية W.C.: 1. خط مياه باردة WC^{1/2}. 2. خط مياه ساخنة WH^{1/2}.	
--	--	--	--	--	--

			3. مصرف ارضي قياس 20 سم X 20 سم ستانلس ستيل. 4. خط تصريف المرحاض ومهما كان الامر لا بد من تشغيل الوحدة الصحية حسب المعطيات اللازمة. 5. توريد وتركيب مروحة شفط مناسبة توصل الى المنور القريب من الوحدة مع التمديدات الكهربائية اللازمة. الأعمال الكهربائية: 1. توريد وتركيب لوحة توزيع كهرباء نوع ABB او شنايدر ويوافق عليه مكونه من: أ. قاطع رئيسي 100 MCCB امبير 3 فاز. ب. قواطع فرعية عدد (3) 40 امبير 3 فاز لتغذية أجهزة التعقيم. تغذى من اللوحة الرئيسية في الطابق 2. توريد وتمديد واختبار كابل نحاس مقطع CV/ XLPE/PVC 5x16 mm² شامل المواسير وكل ما يلزم وذلك لأجهزة التعقيم وعددها اثنان ويفضل نوع كيبلكوم او المتحدة. 3. توريد وتركيب لوحة كهربائية فرعية نوع ABB او شنايدر مكونة من: - قاطع رئيسي 3 فاز 60 امبير. - قواطع فرعية يحدد عددها حسب الدوائر الكهربائية وذلك لتغذية الاباريز والانارة. نظام الانارة: 1. توريد وتركيب وتوصيل واختبار نقاط الانارة حسب المخطط ويحمل على البند المواسير البلاستيكية وعلب التوصيل والتجميع والاسلاك والكوابل CV/PVC بمساحة مقطع 2.5x2 مم² وجميع ما يلزم لإتمام العمل وتشغيل الإضاءة. 2. توريد وتركيب مفتاح MK او ليجراند بمفتاح ويحمل عليه جميع المواسير البلاستيكية بمساحة 2.5 مم² وجميع ما يلزم لإتمام العمل. 3. توريد وتركيب وتشغيل وتوصيل وحدات انارة LED مربعة الشكل
	عدد	1	
	م.ط	40	
	عدد	1	
	مقطوع		
	عدد	15	

			60 سم X 60 سم وتركيب داخل السقف الثانوي نوع ممتاز يوافق عليه .48W
		35	عدد
		15	عدد
			اعمال الاباريز الكهربائية ونقاط (IT) والهاتف: 1. توريد وتوصيل واختبار مخارج قوى كهربائية حسب المخطط ويشمل البند المواسير البلاستيكية وعلب التوصيل من النوع الداخل الجدران باستعمال اسلاك بمسافة مقطع (3*4 مم²) (PH+N+E) وان تكون نوعية الاباريز MK او ليجراند (13) أمبير مفرد او مزدوج مع مفاتيح وحسب المخطط E1= 15 ، E2= 13 . 2. توريد وتركيب وتشغيل مخرج احادي (RJ – 45) ويحمل على بند الاباريز نوع (R8M) والمواسير البلاستيكية وعلب التوصيل والتجميع مع الكوابل نوع UTP cable 4 Pair 23AWG, CAT6a

* مدة تنفيذ جميع الاعمال: (8 شهور) من تاريخ امر المباشرة.

أعمال غرفة العمليات وتوابعها

البند	وصف العمل	الوحدة	الكمية	السعر الافراضي	السعر الاجمالي
2	1. الأعمال التحضيرية: كما ورد في وصف الاعمال التحضيرية لمشروع القدم شاملاً البند رقم 1,2,3. 2. اعمال الطوب والقصاره: كما ورد في وصف هذا البند في الاعمال التحضيرية لمشروع القدم شاملاً البند رقم 1,2,3. 3. الأسقف المعلقة: توريد وتركيب اسقف ثانوية معلقة معدنية نوع (Skin Plated) مربعة الشكل قياس 60 سم X 60 سم لون ابيض ومثبتة حسب الأصول من مواد غير قابلة للصدأ يوافق عليه من قبل المهندس. 4. الأبواب الخشبية وتوابعها: 1. توريد وتركيب حلق باب معدني حسب المواصفات الواردة بهذا الخصوص مدهونة ومثبتة حسب الأصول وبلون مناسب يوافق عليه. 2. توريد وتركيب أبواب خشبية حسب المواصفة الواردة وتكون الأسعار للباب وحسب القياس على المخطط. 3. توريد وتركيب حماية سفلية للأبواب (Skirting) حسب المواصفات السابقة.	مقطوع مقطوع متر مربع 8 8 مقطوع	100 150 200 10		

		اعمال البلاط لغرفة العمليات وتوابعها:	
	150	متر مربع	1. توريد وتركيب بلاط جدران لغرفة العمليات من نوع مقاوم للرطوبة والعفن صناعة أوروبية نخب اول قياس مناسب يوافق على اللون والنوعية والقياس من قبل المهندس واستعمال الروبة الخاصة ببلاط غرف العمليات.
	25	متر مربع	2. بلاط ارضي سيراميك نفس السابق.
	75	متر مربع	3. توريد وتركيب بلاط موزاييك لأرضية غرفة العمليات والانعاش مع الترتيب والجلي حسب الأصول.
	75	متر مربع	4. توريد وتركيب (P.V.C) ارضي رولات نوع (Anti - Static) مع جميع لوازم تركيبه حسب الأصول وان يكون سمك الـ P.V.C لا يقل عن 2 مم وان يكون التركيب حسب متطلبات غرفة العمليات.
		تابع وصف غرفة العمليات (التمديدات الصحية):	
		مقطوع	1. توريد وتمديد وتوصيل وتشكيل خط مياه باردة وساخنة (CP+CW) قطر 3/4 حسب المخطط وبالارتفاع المبين على المخطط ويتم وصلها على لوحة التوزيع في الموقع والتي سوف يتم تركيبها في غرفة فرك الايدي.
		مقطوع	2. غرفة فرك الايدي (Scrub Room) توريد وتمديد خط مياه باردة + ساخنة + مصرف وحسب البند السابق (DR+WH+WC) حسب الوارد على المخطط.
	1	مقطوع	3. خط صرف في الجدار قياس 1 1/4.

			مقطوع	4. غرفة الإنعاش (Recovery) توريد وتمديد خط مياه (باردة + ساخنة + مصرف) حسب السابق وحسب المخطط.
			مقطوع	5. غرفة انتظار مرضى (Patient Holding) نفس البند السابق.
			مقطوع	6. غرفة D/V نفس البند السابق + مصرف عدد اثنان وحسب المخطط.
				الأعمال الكهربائية: حسب مخطط الاباريز + نقاط IT والهاتف:
	30	عدد		1. توريد وتوصيل واختبار مخارج قوى كهربائية حسب المخطط ويشمل البند المواسير البلاستيكية وعلب التوصيل من النوع داخل الجدران وباستعمال اسلاك او كوابل 3*4 مم ² ، وان تكون الاباريز MK او ليجراند (13) أمبير مفرد او مزدوج وان تكون الاباريز ذات Switch وحسب المخطط E1 عدد 5، E2 عدد 10 وحسب الارتفاع المبين على المخطط.
				2. غرفة فرك الايدي + المستودع كالسابق E1 عدد 2.
				3. غرفة الإنعاش وغرفة الانتظار كالسابق E1 عدد 5، E2 عدد 5.
				مخارج IT: توريد وتركيب وتشغيل ووصل مخارج أحادية (RJ - 45) ويحمل على الاباريز نوع (R8M) المواسير البلاستيكية وعلب التوصيل والتجميع مع الاسلاك والكوابل نوع UTP Cable 4 Pair 23 AWG CAT 6a وحسب المخطط.
	6	عدد		

		3	عدد	اعمال صحية للمشروع كاملاً: 1. توريد وتركيب وتوصيل خزانة توزيع مياه باردة وساخنة لاستخدامها لتوصيل المياه الى النقاط الواردة في جدول الكميات وتوصيلها وربطها مع الشبكة الرئيسية في الموقع وتشمل العمل كامل المواد اللازمة للتركيب والتشغيل حسب الأصول ويتم اختيار المقطع بالتشاور مع المهندس. اعمال الطراشة والدهان: ويشمل اعمال الدهان والطراشة للموقع كاملاً وحيثما يلزم شامل كافة المواد لمناطق التعديلات على الجردان القائمة والقسارة والصيانة ومناطق الرطوبة باستخدام دهانات وأملشن أكشيل ومعجون من شركة ديوكس او القدس وكذلك دهان حلوق الأبواب والابواب القديمة في الوحدة وحسب الطلب. اعمال دكت توزيع الهواء: عمل التعديلات اللازمة في مسار خطوط دفع وسحب الهواء حسب تصميم المكان يتم رسمه من قبل المقاول. أعمال تكييف الهواء والتهوية: 1. توريد وتركيب مبرد (Water Chiller) بقدرة مناسبة للموقع قيد التحديث، يتم تقديم عرض سعر من شركة بتر. 2. تحديث وصيانة وحدات مناولة الهواء القائمة (A.H.V3, A.H.V4)، عرض السعر يقدم من شركة بتر. 3. تقديم وتركيب وحدة (Casitt Unit) عدد 3 قدرة 2 طن بتبريد للوحدة/ لغرفة العمليات وتوابعها، يتم تقديم عرض سعر من شركة بتر.
			مقطوع	
			مقطوع	

نائب رئيس المركز الوطني للسكري
والغدد الصم والوراثة
الأستاذ الدكتور محمد الخطيب



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

Ref.

الرقم: ٤٨٤٩ / ٨ / ٥٨

Date

التاريخ: ٤٨٤٩ / ٨ / ٥٨

**** ملاحظة هامة: توقع هذه الوثيقة وتختم بختم الشركة وترفق مع النسخة الاصلية للعروض.**

الرقم: / /

التاريخ: / /

إقرار وتعهد

رئيس لجنة العطاءات المركزية / المركز الوطني للسكري والغدد الصم والوراثة.

بناء على دعوة العطاء (ع م/ 2025/8 إعادة طرح) الخاص وبعد أن اطلعت وتفهمت كافة بنود تعليمات اللوازم والاشغال والشروط العامة النافذة والمعتمدة من قبل لجنة العطاءات المركزية في مركزكم والشروط الخاصة والمواصفات والمخططات به وكل الوثائق الأخرى المتعلقة به فأنتني أقدم عرضي لهذا العطاء موقعاً ومختوماً على جدول عرض الأسعار واتعهد بأن أقوم بالإشراف على تنفيذ كافة مراحل البناء وحتى استلامه استلاماً أولاً بموجب ذلك ووفقاً لكافة وثائق العطاء.

وفي حال الإحالة علينا فأنتني اعتبر توقيعني بالتبليغ على قرار الإحالة ومصادقة الجهة صاحبة الاختصاص في المركز الوطني للسكري عليه يشكل مع وثائق العطاء المشار إليها في المادة (1) الفقرة (ب) من الشروط العامة المشار إليها أعلاه عقداً ملزماً إلا إذا ورد في قرار الإحالة ما يخالف ذلك.

واننا نلتزم بسريان كفالات وتأمينات الدخول في العطاء وكذلك صلاحية اسعارنا لمدة (120) مائة وعشرون يوماً اعتباراً من تاريخ آخر موعد لإيداع عروض هذا العطاء وفي حال عدم الرغبة في التمديد سنقوم بتبليغ دائرة اللوازم والعطاءات خطياً بذلك قبل انتهاء المدة المحددة بعشرة أيام عمل على الأقل والا يعتبر عرضنا والكفالات وتأمينات الدخول سارية المفعول حكماً لفترة (120) مائة وعشرون يوماً أخرى وتجدد تلقائياً ولمدد متعاقبة.

مرفقين بطيه كفالات وتأمينات الدخول المطلوبة علماً بأننا قد دفعنا ثمن نسخة العطاء المقرر بموجب الايصال رقم تاريخ (...../...../.....).

المفوض بالتوقيع

اسم المشترك:

العنوان:

العنوان الالكتروني:

الختم

هاتف (.....)

فاكس (.....)



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

الرقم: Ref.

التاريخ: Date

الشروط العامة للعطاء رقم (ع م/8/2025 إعادة طرح)

1. أ) يطبق على هذه الشروط نفس معاني الكلمات والعبارات الواردة في المادة (2) من تعليمات اللوازم

والأشغال النافذ في المركز الوطني للسكري لعام (2016).

ب) تعتبر الوثائق التالية جزءاً لا يتجزأ من وثائق العطاء: -

❖ التشريعات النافذة في المملكة الأردنية الهاشمية.

❖ تعليمات اللوازم والأشغال النافذ في المركز الوطني للسكري.

❖ الشروط العامة والشروط الخاصة للعطاء.

❖ المواصفات العامة والخاصة باللوازم أو الأشغال.

❖ الكفالات والتأمينات.

❖ العقد أو الاتفاقية.

❖ المخططات والكتالوجات وجداول الكميات التي يقدمها المركز أو يقدمها المتعهد للمركز

ويعتمدها المركز الوطني للسكري.

❖ قرار الإحالة وشروطه.

❖ أية مواصفات أو إيضاحات تتم على هذه الوثائق وحتى انتهاء العقد.

2. يلتزم كل متقدم بتحديد اسم الشخص المفوض بالتوقيع بموجب نموذج مخصص لهذه الغاية على أن

يكون موقعاً من الشخص المعتمد بالتوقيع في سجلات وزارة الصناعة والتجارة وشهادة مختومة

من طرفهم بصحة التوقيع.



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

الرقم: Ref.

التاريخ: Date

3. أ) تستبعد العروض المالية غير الموقعة من مقدميها أو وكلائهم على كل صفحة من هذه العروض.

ب) لا يقبل العرض الذي يقدم بعد الموعد المحدد.

ج) يقدم العرض على النموذج المقرر مطبوعاً أو مكتوباً بخط اليد باستثناء تعبئة المواقع المطلوبة

ولا يجوز ادخال أي تعديل أو إجراء أي تغيير أو كشط في نموذج العرض للعطاء أو أي من وثائق

العطاء المرفقة به من قبل المشترك إلا إذا اقتضت الضرورة غير ذلك وعندها على المشترك التوقيع

بجانب الكشط أو المحو أو التعديل أو الإضافة وإلا فلجنة أن تستبعد العرض.

4. يقدم العرض الورقي من نسختان (أصل وصورة) توضع كل نسخة في مغلف منفصل على أن يكتب

على مغلف كل منها وبخط واضح "النسخة الأصلية" أو "النسخة الأولى" حسب مقتضى الحال

وأيضاً اسم المشترك وعنوانه ورقم الهاتف ورقم الفاكس والبريد الإلكتروني ورقم العطاء

وموضوعه ويتم وضع التأمين الخاص بدخول العطاء داخل مغلف مكتوب على ظهره "تأمين دخول

للعطاء رقم " في مغلف مختوم معنون باسم (لجنة العطاءات المركزية - المركز

الوطني للسكري) ومكتوب عليه بخط واضح اسم المشترك وعنوانه ورقم الهاتف ورقم الفاكس ورقم

العطاء وموضوعه.

5. على المتقدم أن يبين في عرضه عنواناً ثابتاً ورقم الفاكس والبريد الإلكتروني ترسل إلى أي منها

جميع المراسلات المتعلقة بالعطاء وعليه أن يبلغ اللجنة بكتاب مسجل عن أي تغيير أو تعديل في

عنوانه وإلا فإنها لن تكون ملزمة بمراجعة هذا التغيير أو التعديل في العنوان وتعتبر جميع المراسلات

بالفاكس أو البريد الإلكتروني أو تلك التي تترك في العنوان المذكور أو ترسل له بالبريد كأنها وصلت

فعلاً وسلمت في حينها.



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

الرقم: Ref.

التاريخ: Date

6. ترفق بالعروض صورة عن السجل التجاري ورخصة المهن سارية المفعول وما يثبت انه خاضع للضريبة العامة على المبيعات ورقمه الضريبي وشهادات التصنيف.
7. يودع العرض من قبل المشترك أو وكيله في صندوق العطاءات المركزية في دائرة اللوازم والعطاءات في المكان المخصص في الموعد المحدد في الإعلان عن العطاء.
8. على المتقدم أن يضع أسعاره رقماً وكتابة على النموذج -ان وجد- وللجنة رفض أي عرض يحدث فيه المشترك تشويشاً في أسعاره وعلى ان تكون شاملة للضريبة العامة على المبيعات.
9. يجوز للمشارك الغاء عرضه بموجب مذكرة موقعة منه تودع في صندوق العطاءات المركزية قبل الموعد المحدد لفتح العروض بيوم عمل واحد على الأقل وله أن يسترد عرضه خلال عشرة أيام عمل من فتح العروض والا يحق لدائرة اللوازم والعطاءات إتلافه.
10. يلتزم المشترك ببرنامج صلاحية أسعاره وكذلك كفالات وتأمينات الدخول الى العطاء لمدة (120) مائة وعشرون يوماً ابتداء من تاريخ اخر يوم لإيداع العروض وفي حالة إعادة طرح العطاء فمن تاريخ اخر موعد لاستلام العروض للعطاء المعاد طرحه وعلى المشترك تبليغ دائرة اللوازم والعطاءات خطياً بعدم رغبته في تمديد صلاحية عرضه قبل انتهاء المدة المحددة بعشرة أيام عمل على الأقل والا يعتبر تأمينه أو كفالاته المقدمة من قبله وعرضه المالي سارية المفعول لفترة (120) مائة وعشرون يوماً أخرى ويعتبر تقديمه للعرض التزاماً بذلك.
11. أ) على المشترك أن يرفق بالعرض لصالح المركز الوطني للسكري ولأمه فقط تأميناً للدخول في العطاء على شكل كفالة مصرفية أو شيكاً مصدقاً من قبل أحد المصارف العاملة في المملكة بنسبة لا تقل عن (3%) ثلاثة بالمائة من القيمة الاجمالية لعرضه وتتضمن عبارة (تجدد تلقائياً ولمدد متعاقبة) ولا ينظر في العروض غير المعززة بتلك التأمينات وبحيث * يتم ذكر اسم المشترك ورقم العطاء على هذا التأمين بوضوح وعلى أن تغطي الكفالة القيمة الأعلى لعرضه في



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

الرقم: Ref.

التاريخ: Date

حال وجود بدائل تحت طائلة استبعاد العرض ولا يفرج عن الكفالة الا بعد صدور قرار الإحالة النهائية وتبلغ المتعهد المحال عليه العطاء وبتنسيب من مدير دائرة اللوازم والعطاءات.
ب) يقدم المتعهد المحال عليه العطاء تأميناً لحسن التنفيذ بنسبة (10%) عشرة بالمائة من قيمة العطاء لأمر المركز الوطني للسكري على شكل كفالة مصرفية أو شيك مصدق من قبل احد المصارف العاملة في المملكة وتتضمن عبارة (تجدد تلقائياً ولمدد متعاقبة) تبقى سارية المفعول لحين استلام المشروع وتشغيله وصدور محضر استلام أصولي و/أو تقرير فني حسب مقتضى الحال ويحفظ هذا التأمين لدى الدائرة المالية في المركز الوطني للسكري كضمان لتأمين تنفيذ العطاء على الوجه الأكمل ولاستيفاء المبالغ التي قد تكون دفعت زيادة على المبالغ المستحقة له ولاستيفاء الغرامات والتعويضات وفروق الأسعار أو التكاليف التي تستحق لحين الانتهاء من تنفيذ العطاء بصورة نهائية وفي حال عدم كفاية الكفالة أو التأمين يتم الرجوع على مستحقاته من عطاءات أخرى نفذها أو يقوم بتنفيذها في المركز الوطني للسكري وعلى أمواله المنقولة وغير المنقولة أو فواتير لصالح المركز الوطني للسكري.

12. تحسب مدة التنفيذ اعتباراً من تاريخ أمر المباشرة وتعرف مدة التنفيذ بأنها مجموع الأيام أو الأشهر التقويمية وتكون شاملة لأيام العطل والجمع والأحوال الجوية الطبيعية والأعياد الرسمية.
13. في حال وجود معلومات متعارضة في العرض يؤخذ بما فيه مصلحة المركز الوطني للسكري ودون المساس بحقوق المشتركين الآخرين ويلزم المشترك به في حال إحالة العطاء عليه كلياً وبما يخصه وللجنة استبعاد أي عرض لا يكون واضحاً بصورة كافية أو يتحمل أكثر من تفسير أو إذا كان ناقصاً في أي من شروط العطاء ويكون تقدير اللجنة بعدم الوضوح أو التعارض كافياً لاستبعاد العرض إلا أنه يجوز للجنة أن تطلب الايضاح المناسب.



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

الرقم: Ref.

التاريخ: Date

14. اللجنة غير مقيدة بالإحالة على أقل الأسعار ولها الحق في إلغاء العطاء كلياً إذا اقتضت مصلحة المركز الوطني للسكري ذلك دون أن يكون لأي من المشتركين الحق في المطالبة بأية خسائر أو ضرر ناتج عن ذلك.

15. اللجنة غير مسؤولة عن أية أخطاء قد يرتكبها المشترك في وضع الأسعار وفي جميع الأحوال تعتمد الأسعار الفردية الواردة في العرض وإذا وجد في أي من العروض المقدمة نقص أو خطأ أو تناقض بين حساب جملة أي مبلغ وما يجب أن تكون عليه هذه الجملة بتطبيق السعر الفردي المعروض لأي بند في جدول الكميات فللجنة الحق في تعديل جملة المبلغ بما يتفق وتطبيق السعر المعروض على كمية ذلك البند وبالتالي تعديل مجموع السعر أو المبلغ المقدم للعطاء وإذا حدث خلاف بين السعر المذكور بالأرقام والمذكور كتابة فتعتبر الكتابة هي الملزمة وكذلك إذا حدث خطأ في جمع قيم مختلف البنود فإن للجنة الحق في تصحيح المجموع ويكون المجموع المصحح في مثل هذا العطاء هو الملزم للمشارك.

16. على كافة المتقدمين الالتزام بالمدة المحددة للإحالات المبدئية وكل اعتراض يرد بعد انتهاء مدة الاعتراض لا يؤخذ به وكذلك لا يؤخذ بالاعتراض للمرة الثانية بدون وجود أسباب اعتراض مقنعة.

17. على كافة المتقدمين عند الإعلان عن الإحالة المبدئية أن ترسل شخص له دراية وخبرة بالعطاء ومواده للاطلاع على الإحالة المبدئية.

18. يعتبر تقديم المشترك لعرضه موافقة منه بأن توقيعه بالتبليغ على قرار الإحالة بعد المصادقة عليه من الجهة صاحبة الاختصاص يشكل مع وثائق العطاء المشار إليها في المادة (1) الفقرة (ب) أعلاه من هذه الشروط عقداً ملزماً إلا إذا ورد في قرار الإحالة ما يخالف ذلك.



المركز الوطني للسكري والغدد الصم والوراثة

NATIONAL CENTER FOR DIABETES ENDOCRINOLOGY & GENETICS

الرقم: Ref.

التاريخ: Date

19. يدفع المشترك المحال عليه العطاء الطابع القانونية ورسم الإحالة ورسوم العقود والرسوم الإضافية وأية رسوم أخرى مستحقة بموجب القوانين والأنظمة المعمول بها ويتم تسديد هذه الرسوم والطابع عند التوقيع على قرار الإحالة.

20. يقر مستلم هذه النسخة بأنه قد اطلع وفهم كافة بنودها وأنه رضي بها رضاً صحيحاً.

21. تبت اللجنة في الحالات التي لم يرد عليها نص في هذه الشروط.

22. زيارة الموقع تكون ظهر يوم الثلاثاء الموافق 2025/10/14 الساعة (1:30 ظهراً).

23. آخر موعد لتقديم الاستفسارات عن شروط ومواصفات دعوة العطاء يوم الخميس الموافق

2025/10/16 الساعة العاشرة والنصف صباحاً ولن يتم قبول أي استفسارات بعد هذا التاريخ.

24. آخر موعد لشراء نسخ دعوة العطاء يوم الثلاثاء الموافق 2025/10/21 علماً بأن يتم شراء نسخ

العطاء ما بين الساعة العاشرة صباحاً وحتى الساعة الواحدة ظهراً في مبنى المركز الوطني للسكري والغدد الصم والوراثة.

25. آخر موعد لتسليم العروض في دائرة اللوازم والعطاءات في المركز الوطني للسكري والغدد الصم

والوراثة الساعة العاشرة والنصف من صباح يوم الخميس الموافق 2025/10/23.

26. أن تكون الشركات الراغبة في المشاركة في هذا العطاء مصنفة درجة (رابعة) أعمال مدنية والكتروميكانيك.

27. ثمن نسخة العطاء (110 دينار) غير مستردة.


الأستاذ الدكتور محمد الخطيب
رئيس لجنة العطاءات المركزية

NATIONAL CENTRE FOR DIABETES, ENDOCRINOLOGY & GENETICS

DIABETIC FOOT CLINICS

MEDICAL PLANNING




AMMAN - JORDAN

INDEX

NCDEG-ZN-DF-01	ZONING PLAN
NCDEG-FURN-DF-02	FURNITURE PLAN
NCDEG-DIM-DF-03	DIMENSION PLAN
NCDEG-CEIL-DF-04	CEILING PLAN



AL — MASHOURA
For Healthcare Technologies

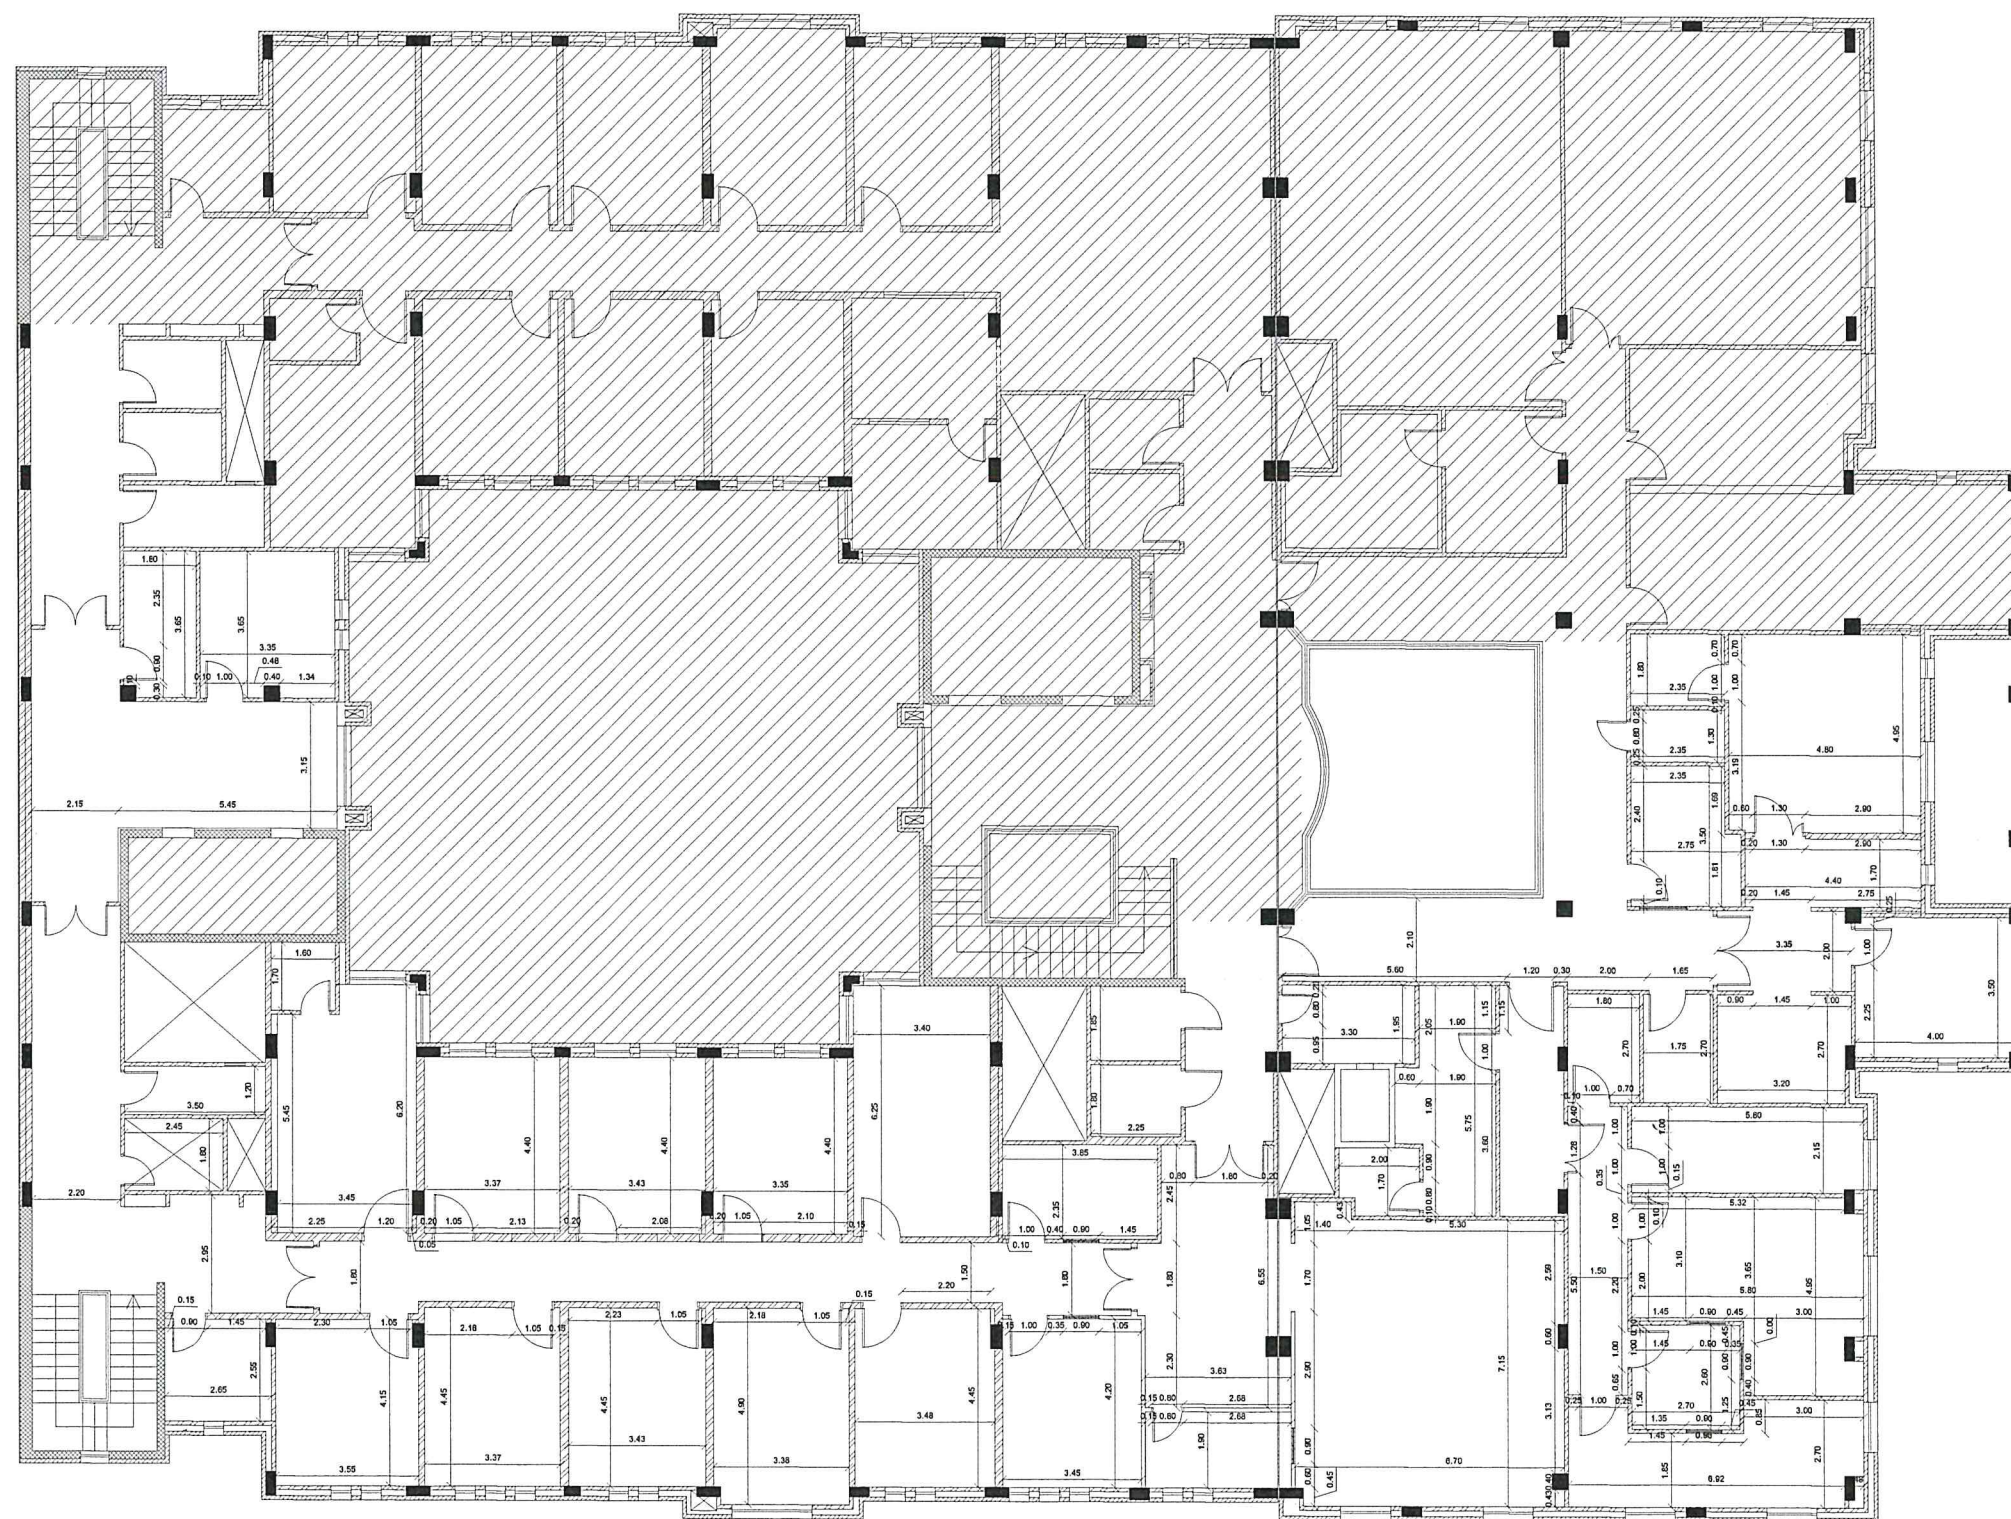

ARCHITECTURAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/18
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS


SHEET NAME :- DIMENSION PLAN
FLOOR No. SECOND FLOOR

SCALE: — 1/100

SHEET NUMBER: —
NCDEG-DIM-DF-02



AL - MASHOURA
For Healthcare Technologies

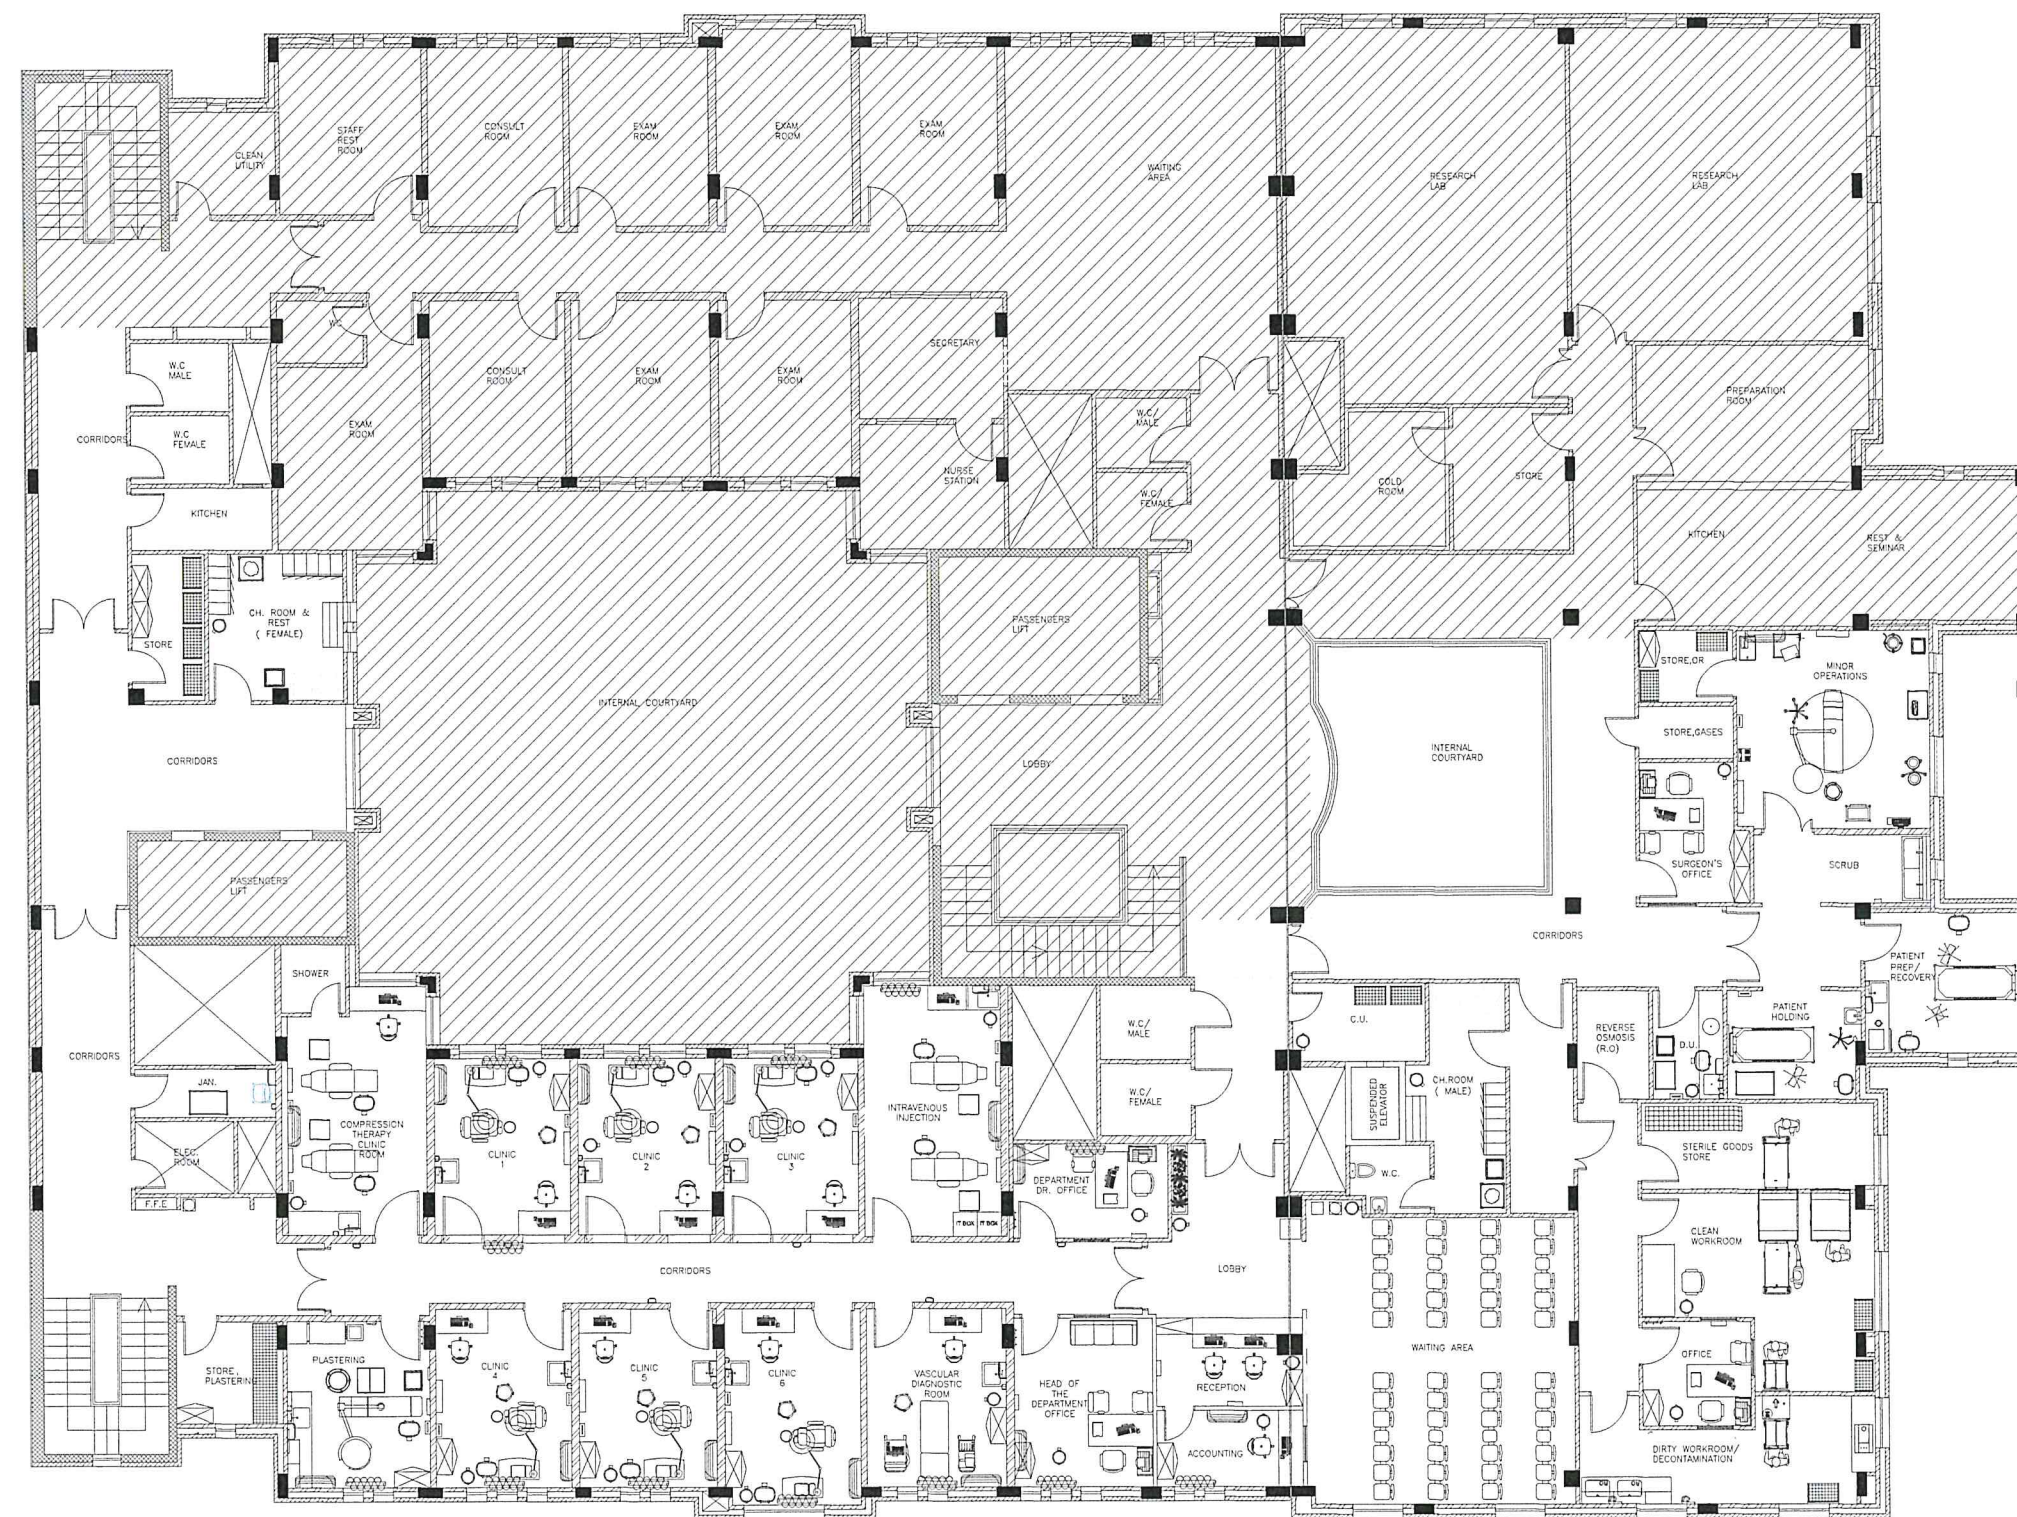

ARCHITECTURAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/18
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

SHEET NAME :- FURNITURE PLAN
FLOOR No. SECOND FLOOR

SCALE:- 1/100

SHEET NUMBER:-
NCDEG-FURN-DF-03



(S) SIGNS DATA LINES (EDT)

CEILING PLAN REFLECTS I.T.
OUTLETS ONLY; WHICH INCLUDING
DATA LINES FOR SIGNS AND WI-FI
CAMERAS

ARCHITECTURAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/18
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

SHEET NAME :- CEILING PLAN
FLOOR No. SECOND FLOOR

SCALE: — 1/100

SHEET NUMBER: -
NCDEG-CEIL-DF-04

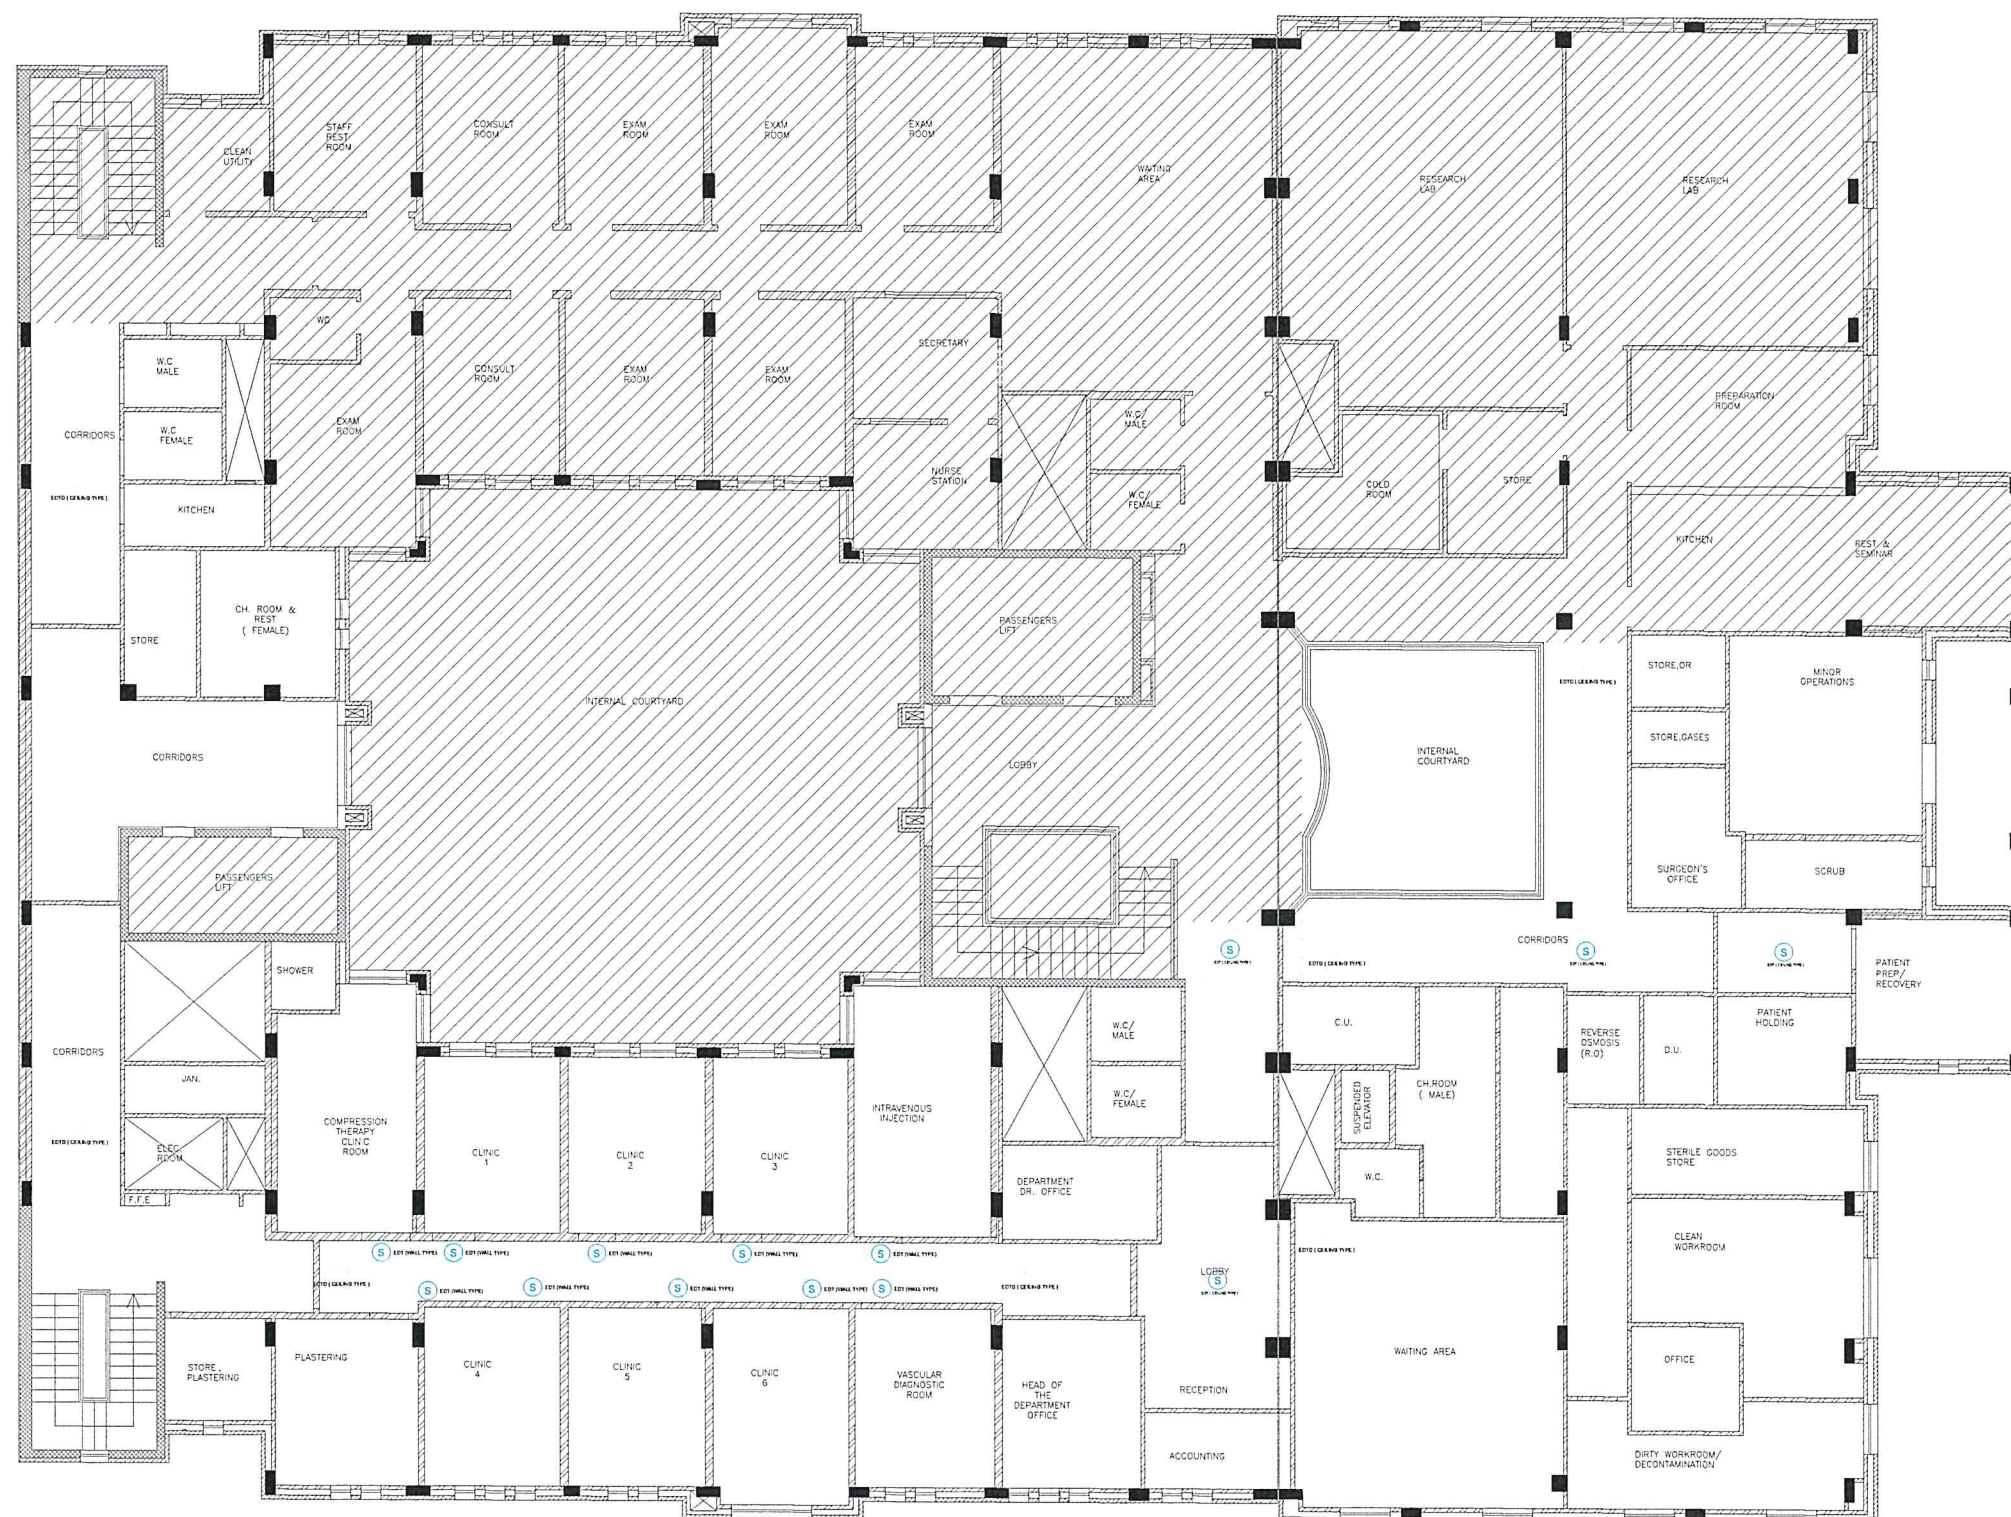

LOC	EQUIPMENT/ ITEM	QTY
1	TABLE OPERATING	1
2	CHAIR, ANAESTHETIST	1
3	CRASH CART, W/ DEFIBRILLATOR, INTERNAL PADDLES	1
4	DIATHERMY UNIT, MONO & BIPOLAR	1
5	LIGHT, SURGICAL, SINGLE	1
6	SHARPS, BIN CONTAINER, WALL TYPE	1
7	STAND BOWL DOUBLE	1
8	STAND, IV, ANTI-STATIC CASTORS	1
9	STOOL, SURGEON, MOBILE	1
10	TABLE, MAYO, MEDIUM	1
11	TROLLEY, INSTRUMENT, S/S, MEDIUM	1
12	TROLLEY, STORAGE 5 DRAWER, A/S CASTORS	1
13	HOLDER, BINSACK	1
14	ILLUMINATOR, X-RAY, DOUBLE	1
15	COMPUTER, WALL-MOUNT	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BOD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: AIR HANDLING UNIT



ROOM TEMP.	20-24
R.H.	20-60
MIN.TOTAL AIR CH.	20
MIN.OTD AIR CH.	4
PRESSURE	P.O.S.
ILLUMINATION	1000
HEAT DISSIPATION	1800 WATT

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	


PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASH
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

CODE	E	MG	N.C	LGT	OTHE

NCDEG-LDD-2ND-DF-5.1

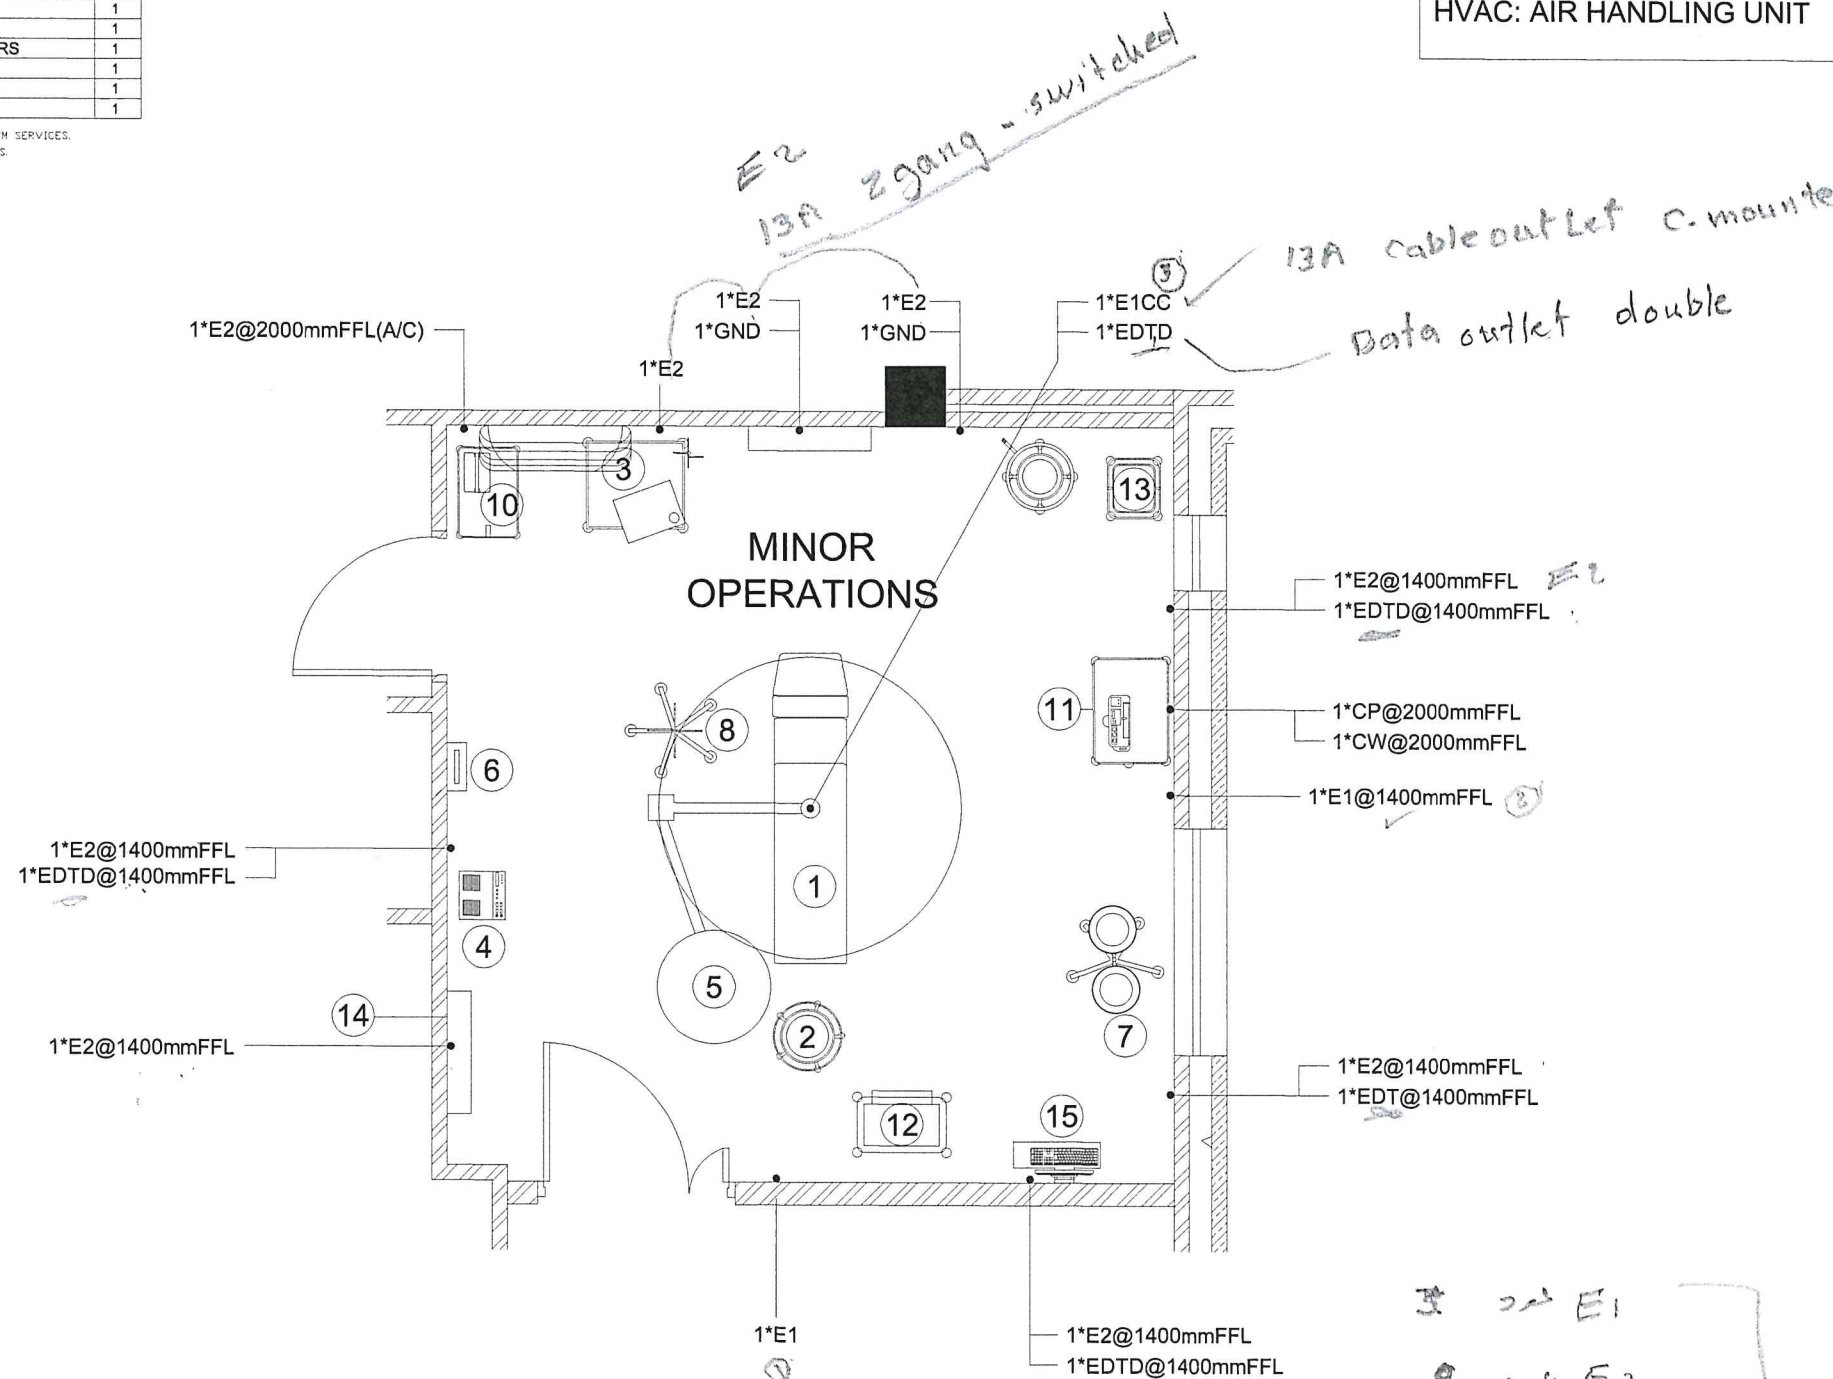

3 22 E1
9 26 E2
5 26 EATC

۱۲ - mm FF

عزیزہ اعلیٰ


- FLOOR TYPE TO BE ANTI-STATIC PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQ.CODE	EQUIPMENT/ ITEM	QTY
1		DISPENSER, BRUSH	1
2		SCRUB SINK, DOUBLE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: AIR HANDLING UNIT



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- SCRUB
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCDEG-LDD-2ND-DF-5.2

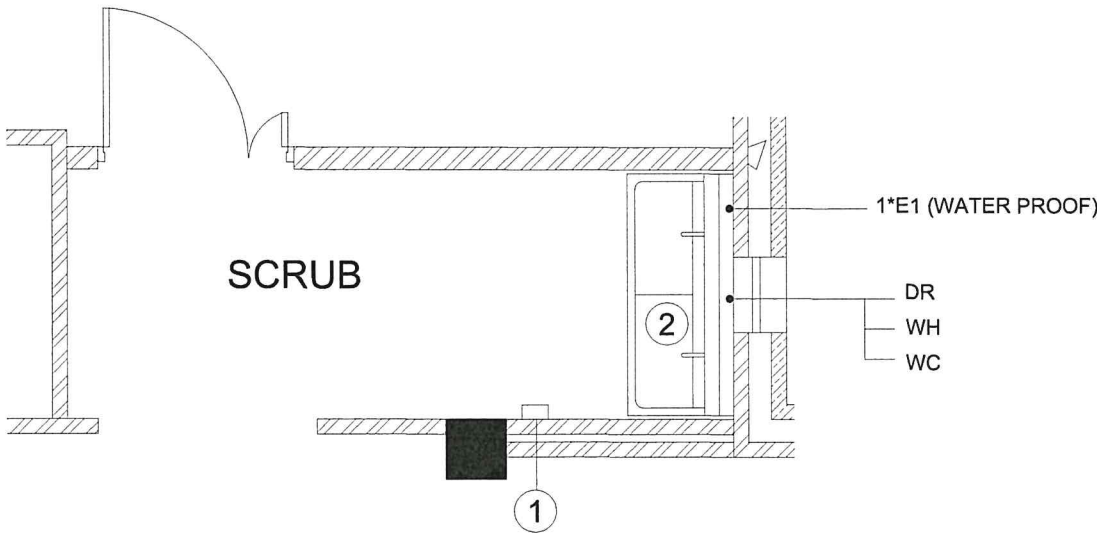

- FLOOR TYPE TO BE ANTI-STATIC PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING



ROOM ENVIRONMENT	
ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES	
POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA	
PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- STORE, OR
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCDEG-LDD-2ND-DF-5.3

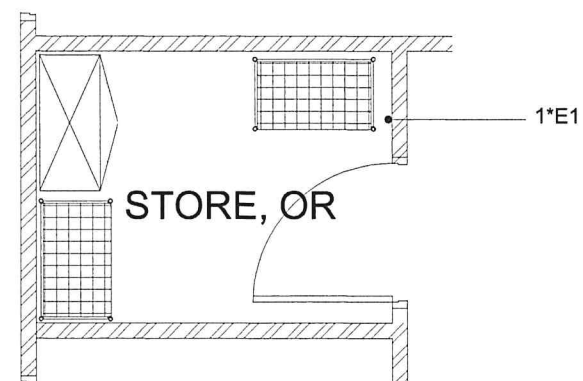

مسند


- FLOOR TYPE TO BE ANTI-STATIC PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQ.CODE	EQUIPMENT/ ITEM	QTY
1		BHU, WALL, SURGERY, PREPARATION/ REC.	1
2		BIN, WASTE, MEDICAL	2
3		LIGHT, EXAMINATION, MOBILE, HIGH INTENSITY	1
4		SHARPS, BIN CONTAINER, WALL TYPE	1
5		STAND, IV, ANTI-STATIC CASTORS	1
6		STRETCHER, PREPARATION/ RECOVERY	1
7		TROLLEY, STORAGE, SS, MULTI-SHELVES, MOBILE	1
8		MONITOR,VITAL SIGN	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: AIR HANDLING UNIT



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	21-24
R.H.	30-60
MIN.TOTAL AIR CH.	6
MIN.DTD AIR CH.	2
PRESSURE	---
ILLUMINATION	500
HEAT DISSIPATION	270 WATT/CUBICLE

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

BHU, PATIENT PREP.

E	MG	NC	LGT	OTHERS
3*E2	1*MO 1*MV 1*M4	1*NE 1*NC		1*EDTD


NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- PATIENT PREP/
RECOVERY
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-

NCDEG-LDD-2ND-DF-5.4

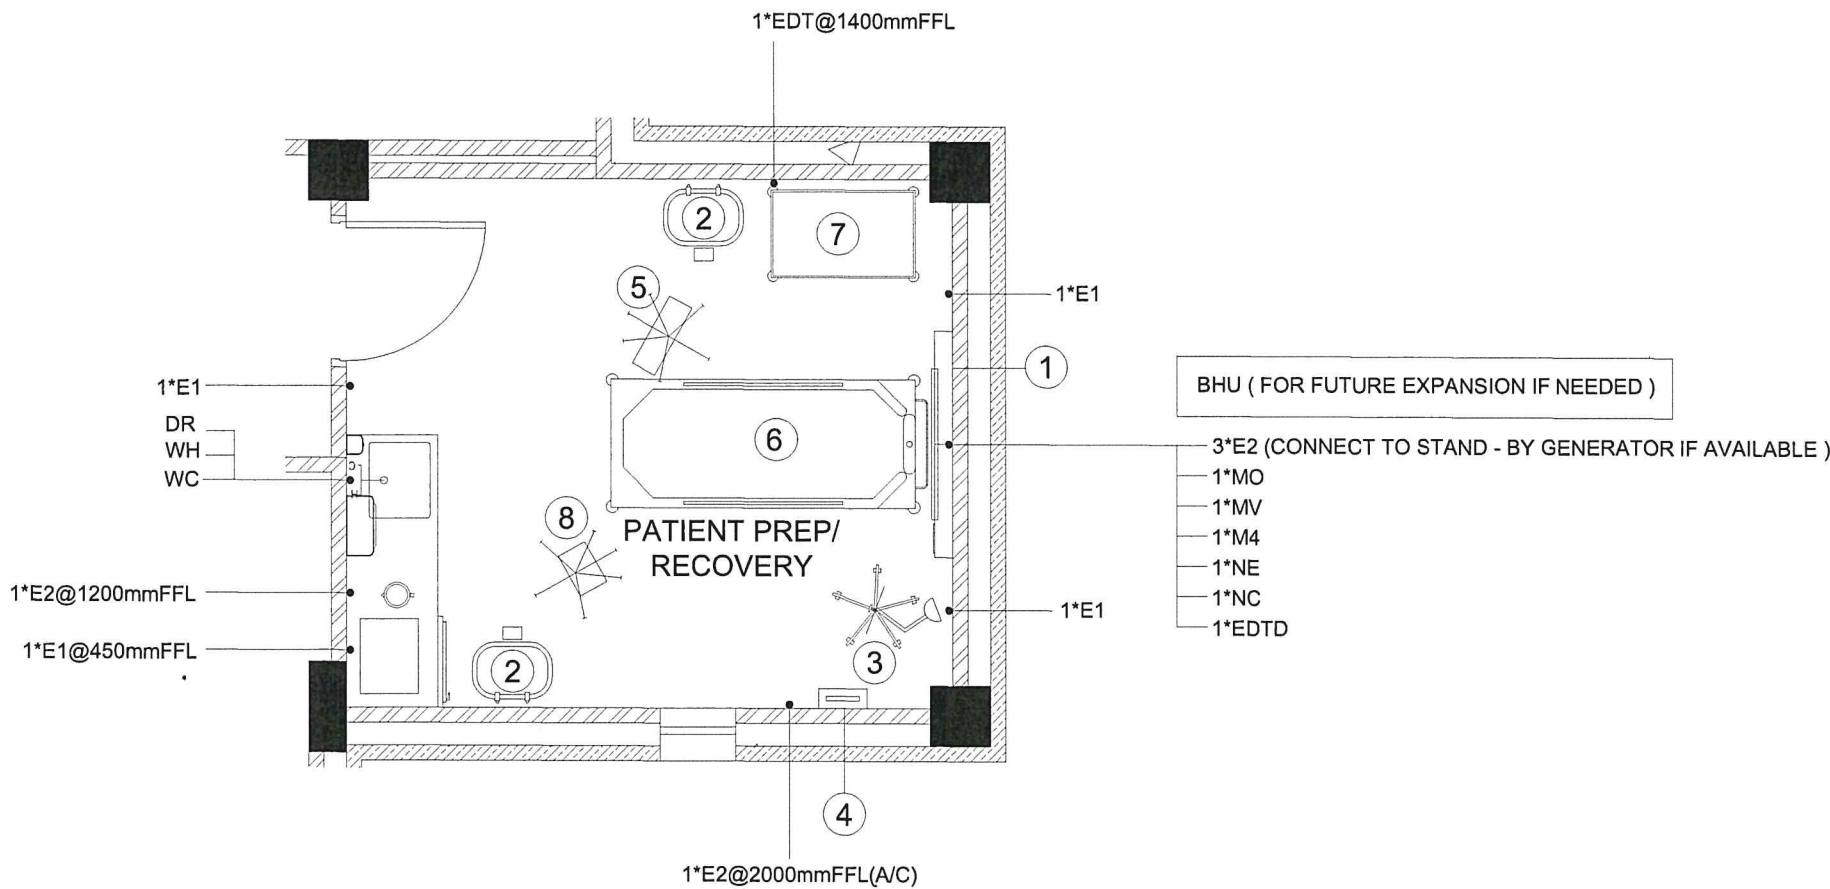

- FLOOR TYPE TO BE ANTI-STATIC PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	E.Q.CODE	EQUIPMENT/ ITEM	QTY
1		BHU, WALL, SURGERY, PREPARATION/ REC.	1
2		BIN, WASTE, YELLOW	1
3		LIGHT, EXAMINATION, MOBILE, HIGH INTENSITY	1
4		SHARPS, BIN CONTAINER, WALL TYPE	1
5		STAND, IV, ANTI-STATIC CASTORS	1
6		STRETCHER, PREPARATION/ RECOVERY	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: AIR HANDLING UNIT



ROOM ENVIRONMENT

ROOM TEMP.	21-24
R.H.	30-60
MIN.TOTAL AIR CH.	6
MIN.OTD AIR CH.	2
PRESSURE	---
ILLUMINATION	500
HEAT DISSIPATION	170 WATT/CUBICLE

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

BHU, PATIENT PREP.

E	MG	NC	LGT	OTHERS
3*E2	1*MO 1*MV 1*M4	1*NE 1*NC		1*EDTD

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- PATIENT HOLDING
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCDEG-LDD-2ND-DF-5.5

BHU (FOR FUTURE EXPANSION IF NEEDED)

3*E2 (CONNECT TO STAND - BY GENERATOR IF AVAILABLE)

1*MO
1*MV
1*M4
1*NE
1*NC
1*EDTD

1*E2

1*E2

PATIENT HOLDING

DR
WH
WC

EDT@1400mmFFL
E2@1400mmFFL


- FLOOR TYPE TO BE ANTI-STATIC PVC FLOORING
- CEILING TYPE TO BE CONSIDERED AS IT IS/ FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	E.Q.CODE	EQUIPMENT/ ITEM	QTY
1		BIN, WASTE, BLACK	1
2		BIN, WASTE, YELLOW	1
3		HOLDER CLINICAL WASTE	1
4		SHARPS, BIN CONTAINER, WALL TYPE	1
5		TROLLEY, LINEN, DIRTY, TRIPLE	1
6		WORKTOP, SS, W/SINK	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: AIR HANDLING UNIT



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	21-24
R.H.	---
MIN.TOTAL AIR CH.	10
MIN.DTD AIR CH.	4
PRESSURE	NEG.
ILLUMINATION	200 Lux
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS


ROOM NAME :- D/U

FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-

NCDEG-LDD-2ND-DF-5.6

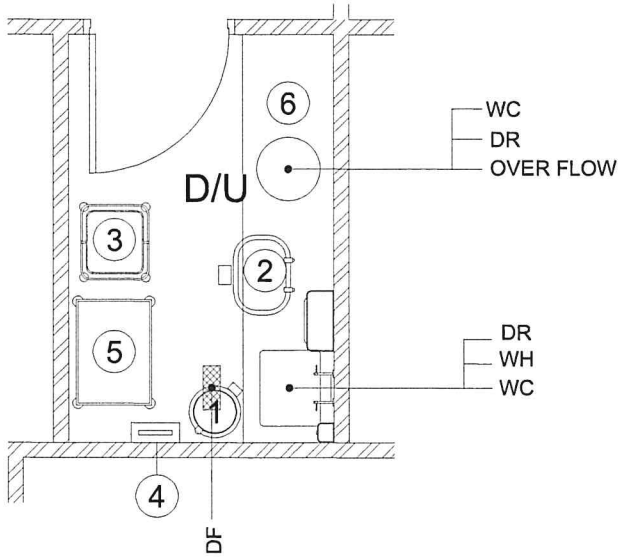

- FLOOR TYPE TO BE PORCELAINE FLOORING
- WALLS TYPE TO BE CERAMIC WALLS
- CEILING TYPE TO BE CONSIDERED FALSE CEILING



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.DTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- REVERSE
OSMOSIS (R.O)
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCDEG-LDD-2ND-DF-5.7

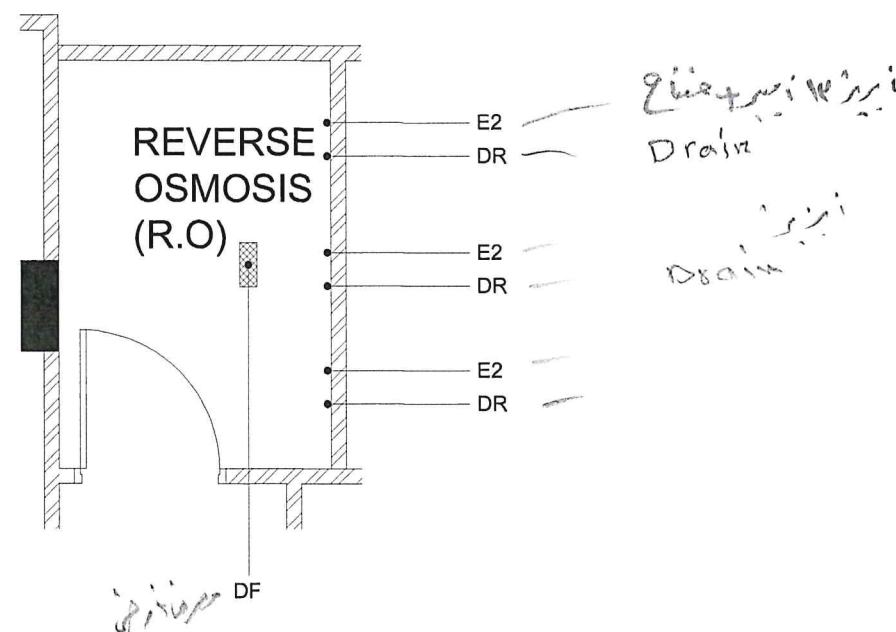


- FLOOR TYPE TO BE PORCELAINE FLOORING
- WALLS TYPE TO BE CERAMIC WALLS
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	WIRE SHELVES, SS, STORAGE, BASKETS/POUCHES	3
2	TROLLY, UNLOADING	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BOD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: AIR HANDLING UNIT



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	22-26
R.H.	MAX 60
MIN.TOTAL AIR CH.	4
MIN.OTD AIR CH.	2
PRESSURE	POS.
ILLUMINATION	300 LUX
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- STERILE GOODS
STORE
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCDEG-LDD-2ND-DF-5.8

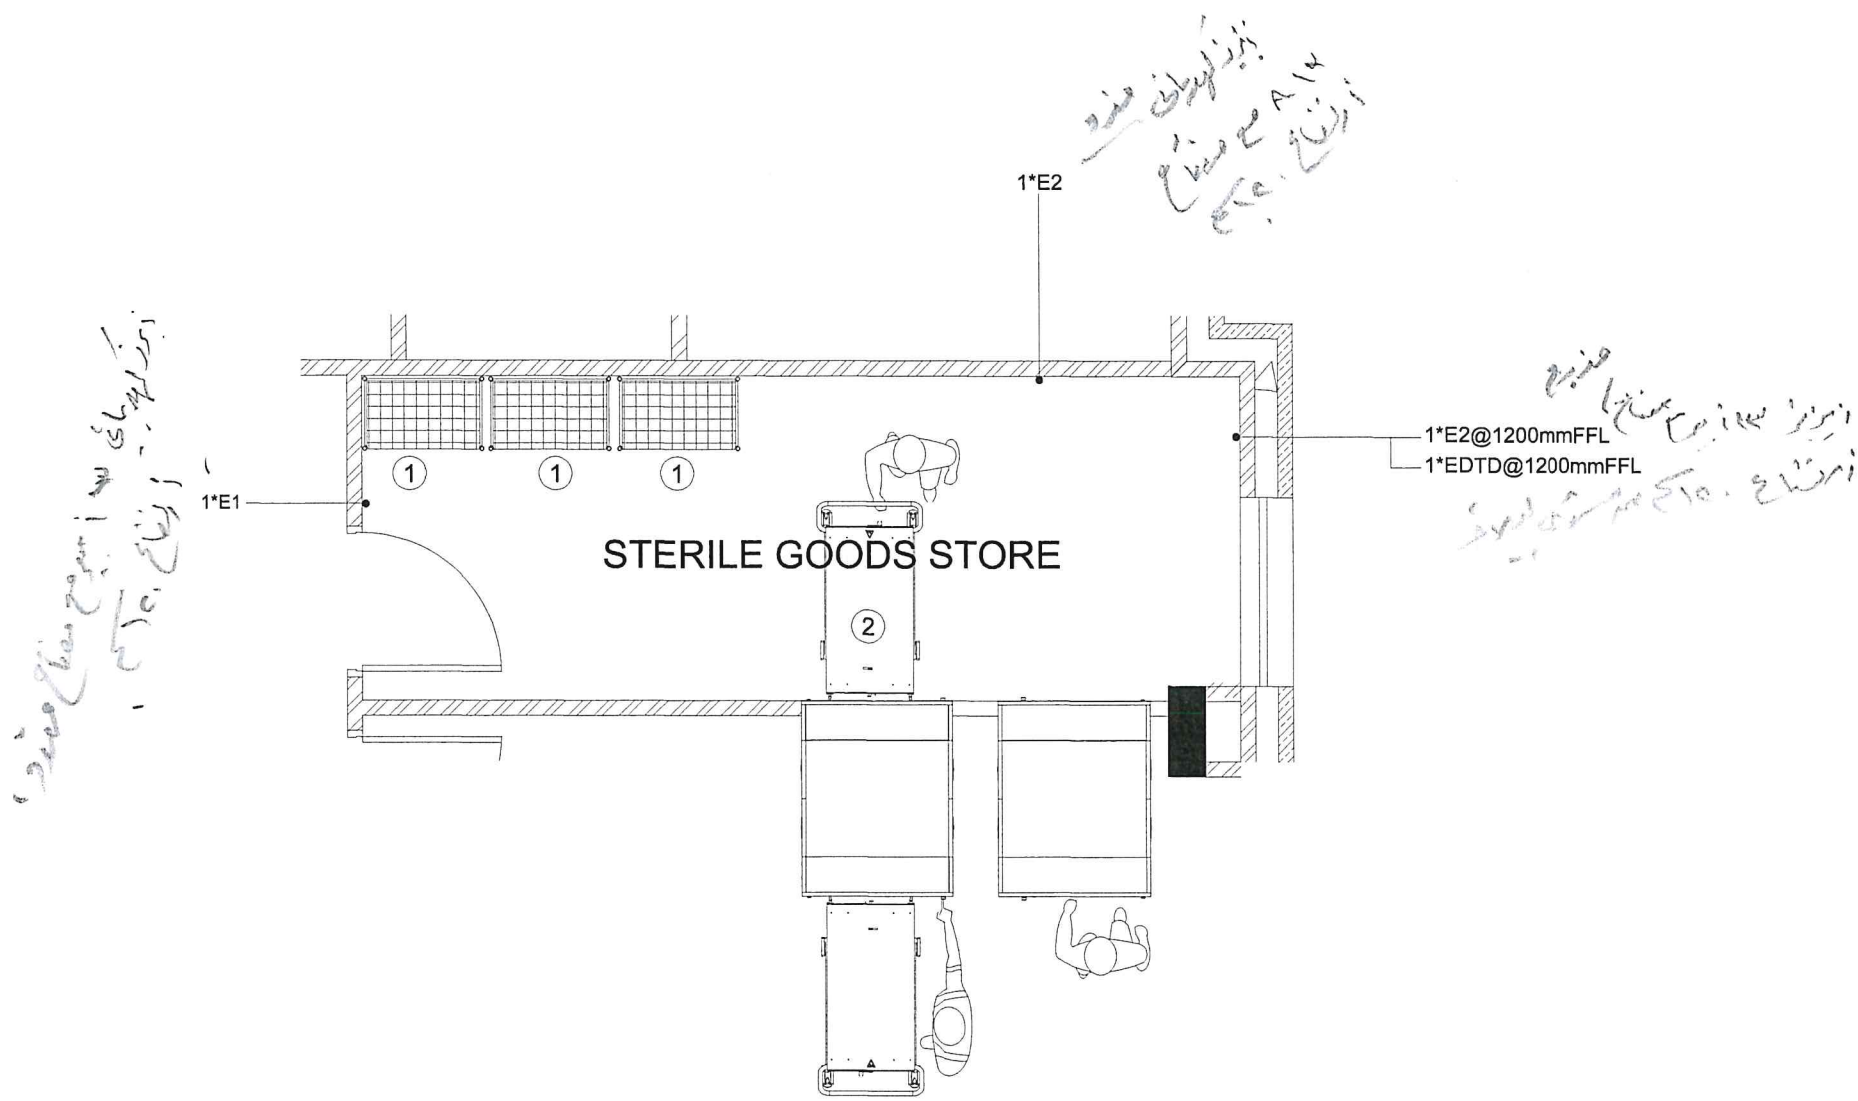

- FLOOR TYPE TO BE PORCELAINE FLOORING
- WALLS TYPE TO BE CERAMIC WALLS
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

LOC	EQUIPMENT/ ITEM	QTY
1	STERILIZER, DOUBLE DOOR	2
2	BIN, WASTE, SS, PAPER	1
3	SHELVES, STORAGE, SS	2
4	TROLLY, LOADING	1
5	PASS THROUGH	1
6	TABLE, WRAPPING, 1800mm, SS	1
7	SEALER, POUCH	1
8	STOOL	1

HVAC: AIR HANDLING UNIT



ROOM TEMP.	22-26
R.H.	MAX 60
MIN.TOTAL AIR CH.	4
MIN.DTD AIR CH.	2
PRESSURE	POS.
ILLUMINATION	300 LUX
HEAT DISSIPATION	CHECK EQUIPEMNT

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV,	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASH
CHECKED BY	ENG. IHSAN FARKOUC
DATE	2024/MAY/14
REVISION 1	---


ROOM NAME :- CLEAN WORKROOM/
PACKING

FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -

NCDEG-LDD-2ND-DF-5.9

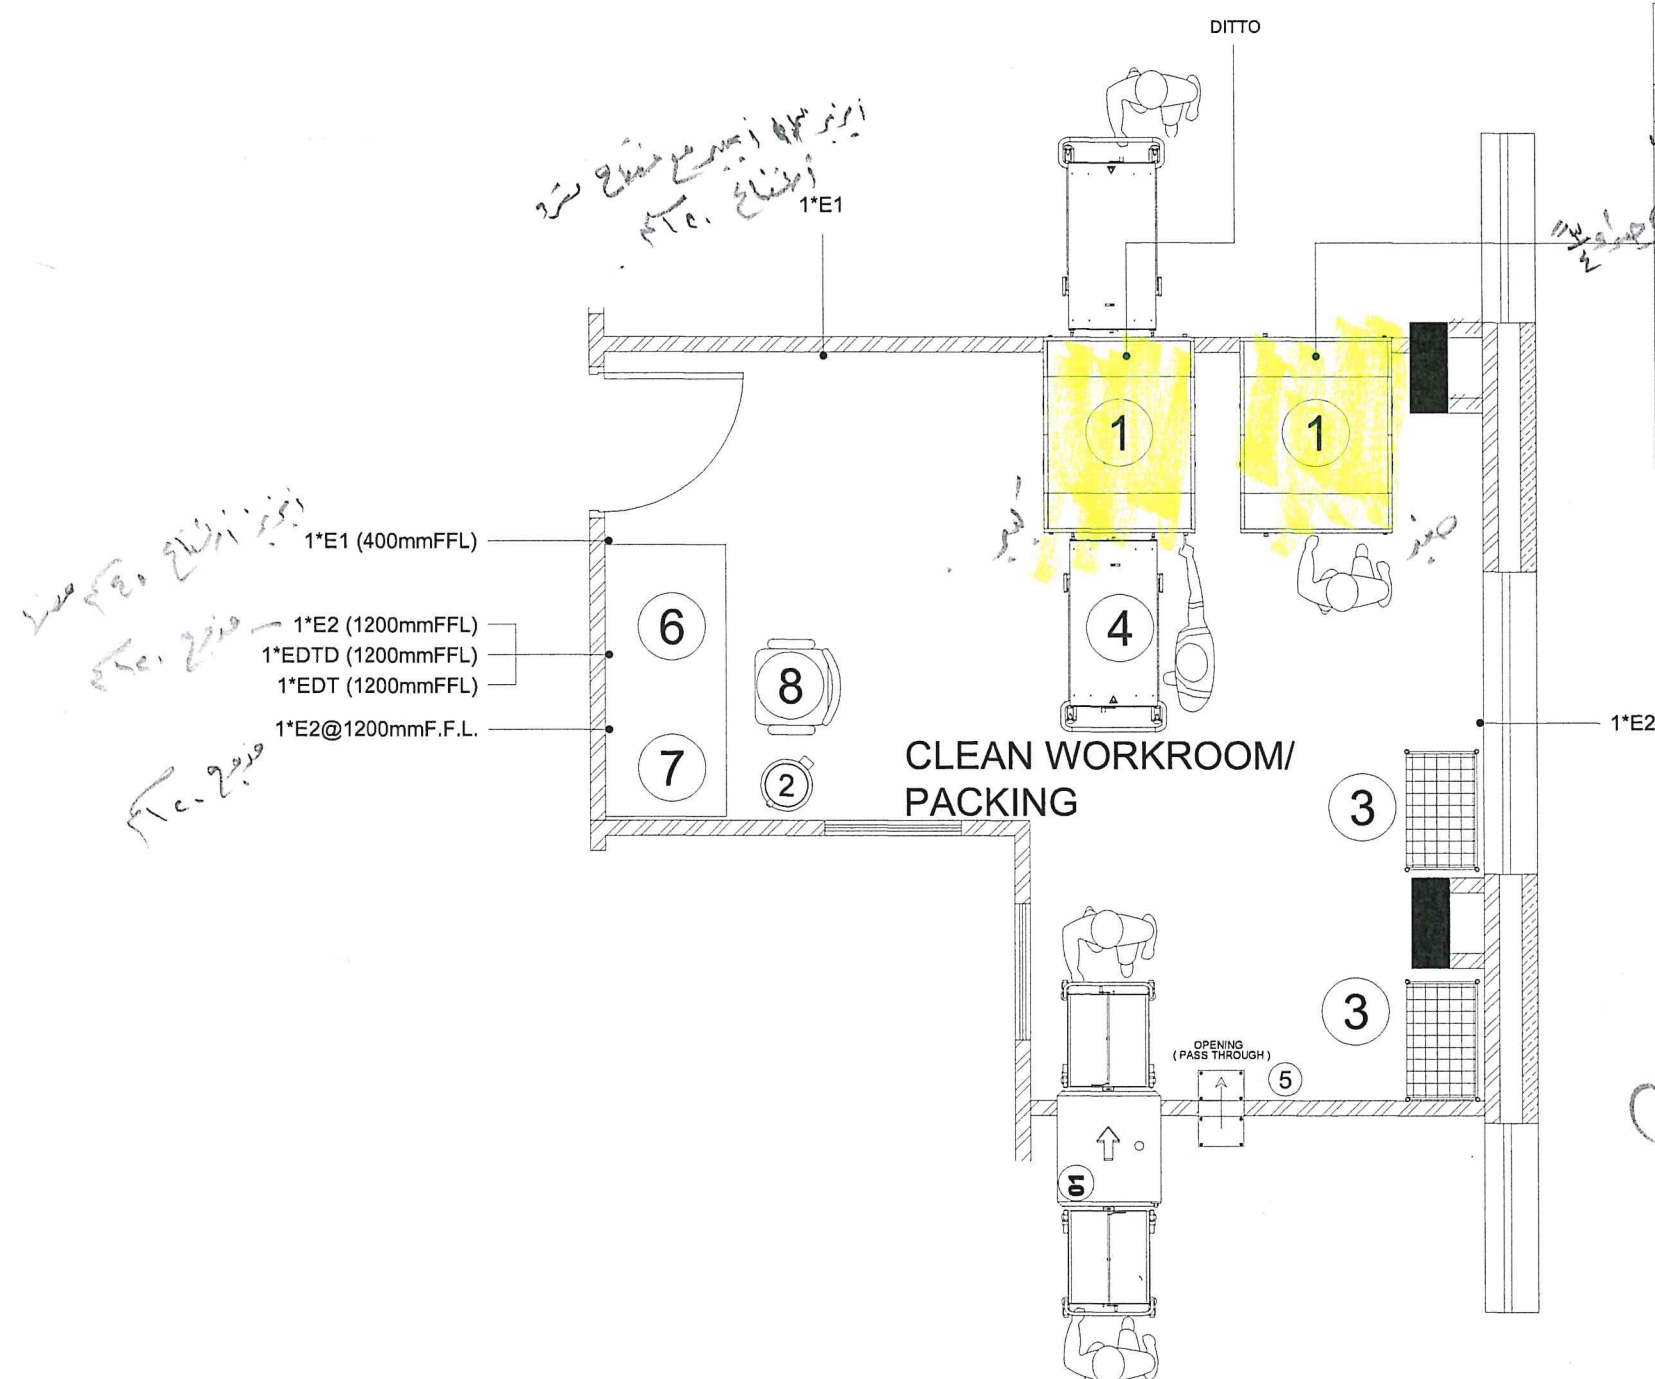

- FLOOR TYPE TO BE PORCELAINE FLOORING
- WALLS TYPE TO BE CERAMIC WALLS
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

جواز تعقيم كبير
جواز تعقيم صغير

الطبائيات الماهرة التعقيم

① خضك ضعيف مدة $\frac{1}{2}$ أ (Caastiron)
عمره ٤٥

② خضك مدة $\frac{4}{6}$ سم الضعيف

③ خضك مدة مضغوط $\frac{4}{6}$

④ خضك مدة نيزيد فطرياً

⑤ خضك كبرياء ٥٥ ل. د. للبحر الكبير
خضك كبرياء ٥٥ ل. د. للبحر الكبير

LOC	EQUIPMENT/ ITEM	QTY
1	BENCH, WORKTOP , PER METER, SS	1
2	ULTRASONIC CLEANER, BENCHTOP	1
3	WASHER, DISINFECTOR, DOUBLE DOOR	1
4	PASS THROUGH, WALL TYPE	1
5	TROLLEY COLLECTION	1
6	GUN, WATER W/NOZZLES	1
7	GUN, AIR	1
8	CABINET, SS, FLOOR MOUNT, DOUBLE SINK, LARGE	1
9	SHELF, FREE STAND	1



ROOM ENVIRONMENT

ROOM TEMP.	22-26
R.H.	---
MIN.TOTAL AIR CH.	6
MIN.QTD AIR CH.	2
PRESSURE	NEG.
ILLUMINATION	300 LUX
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASH
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS


ROOM NAME :- DIRTY WORKROOM/
DECONTAMINATION

FLOOR No. SECOND FLOOR


SCALE: — 1/50

SHEET NUMBER: —

NCD-LDD-2ND-DF-5.10

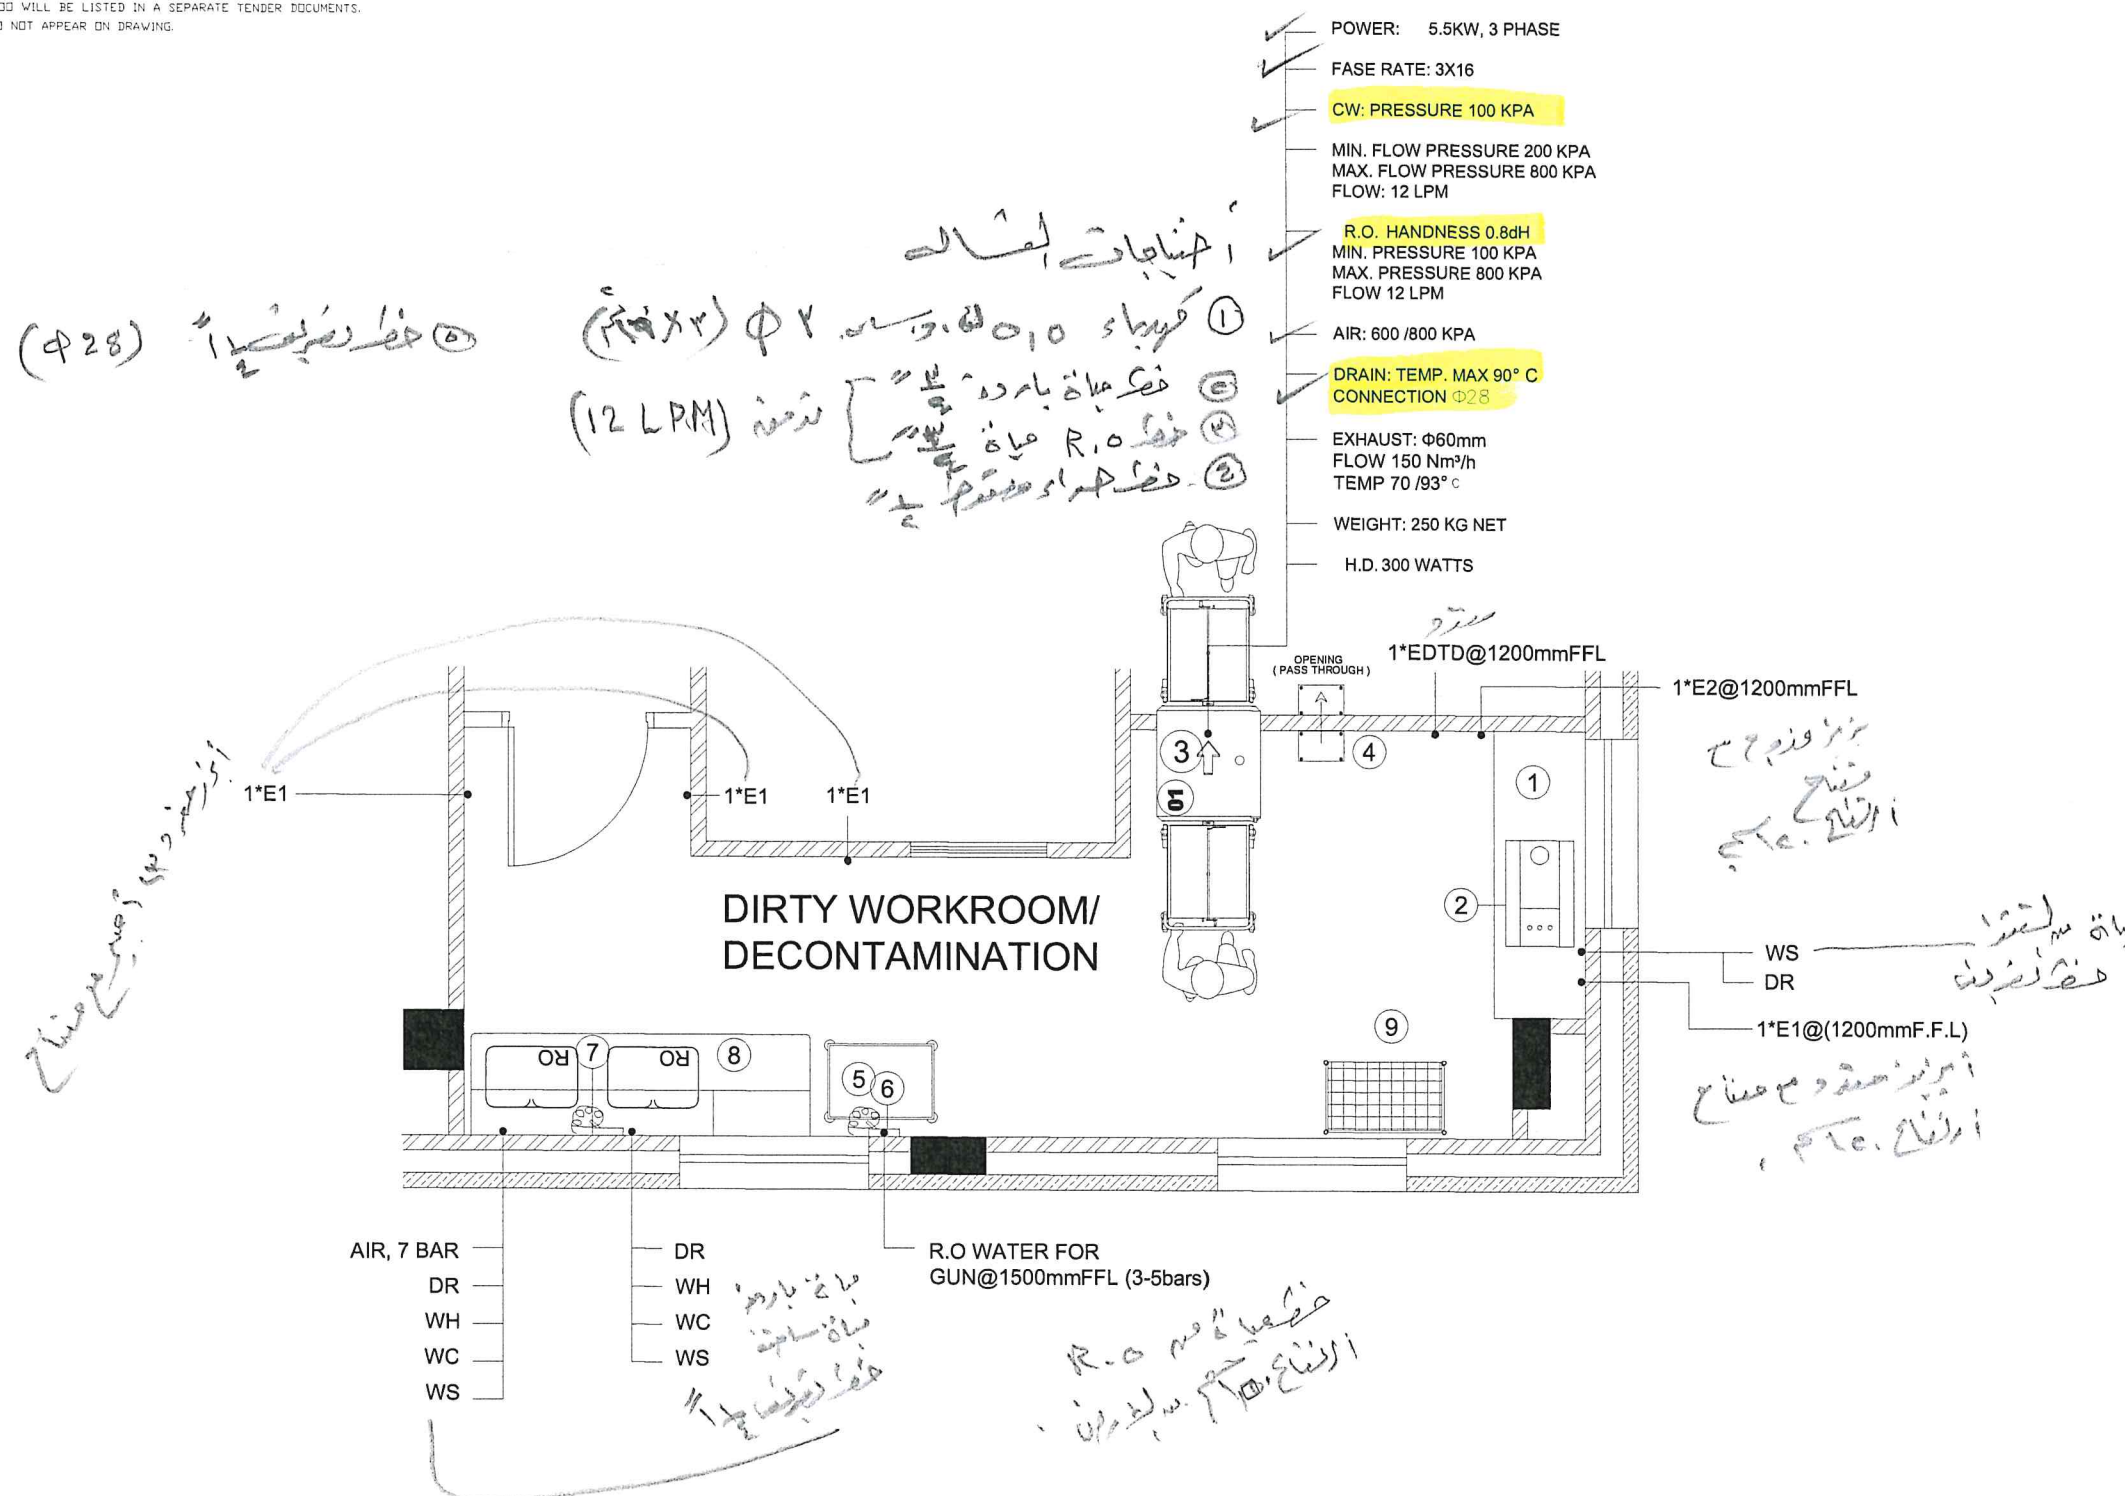

- FLOOR TYPE TO BE PORCELAINE FLOORING
- WALLS TYPE TO BE CERAMIC WALLS
- CEILING TYPE TO BE CONSIDERED FALSE CEILING



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	(300 lux)
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- SUPERVISOR
OFFICE
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCD-LDD-2ND-DF-5.11

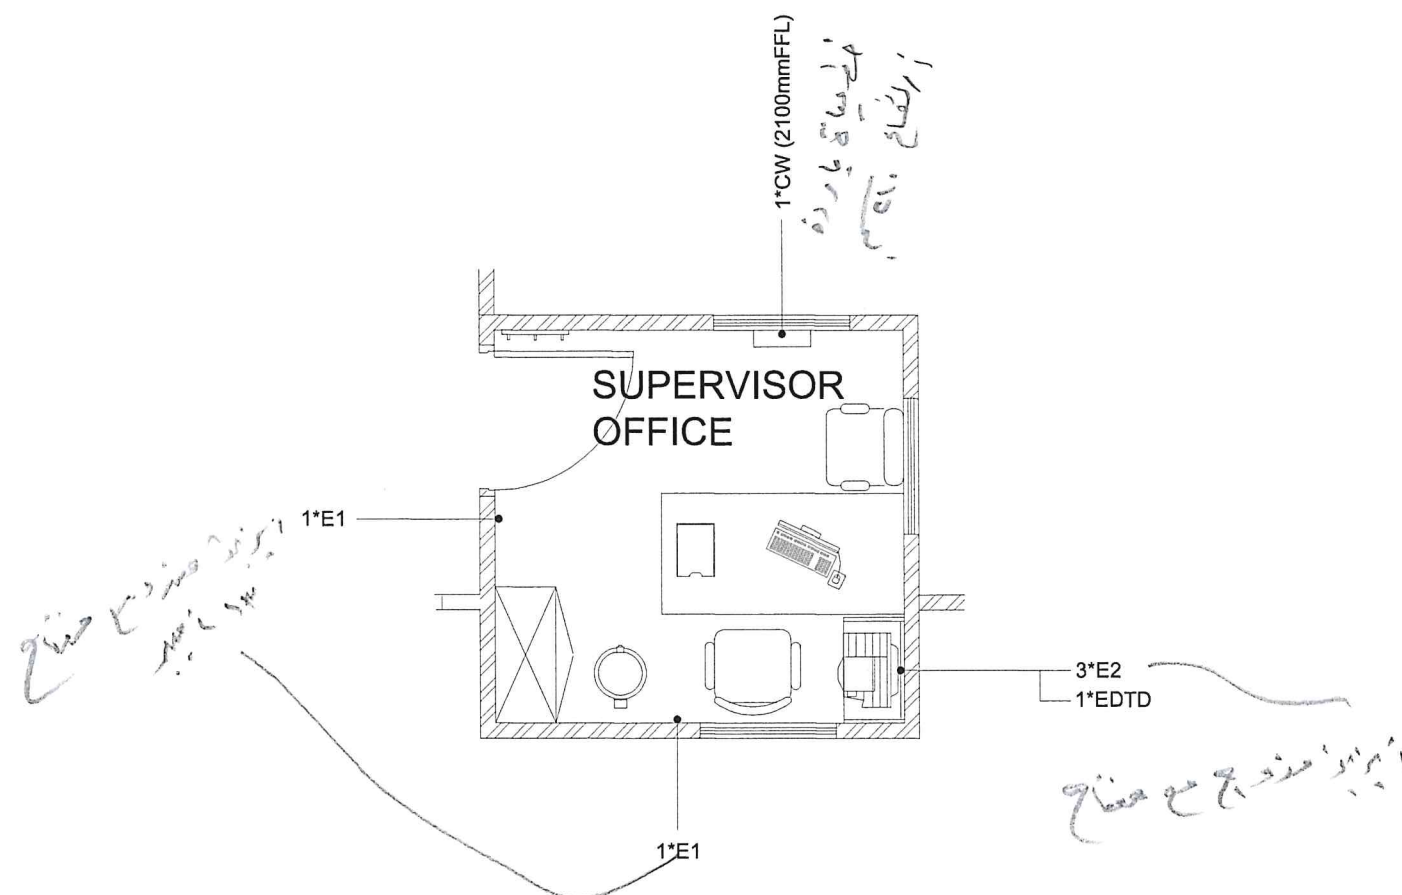


- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING


MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	BENCH, CHANGE, PER METER	1
2	BIN, WASTE	1
3	HOLDER, BINSAC, PEDAL OPERATED,	1
4	LOCKER, CHANGE, FREE STAND, 300MM	6
5	TROLLEY, LINEN, DIRTY, SINGLE	1
6	CHAIR, RECLINER, STAFF	2

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BOD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

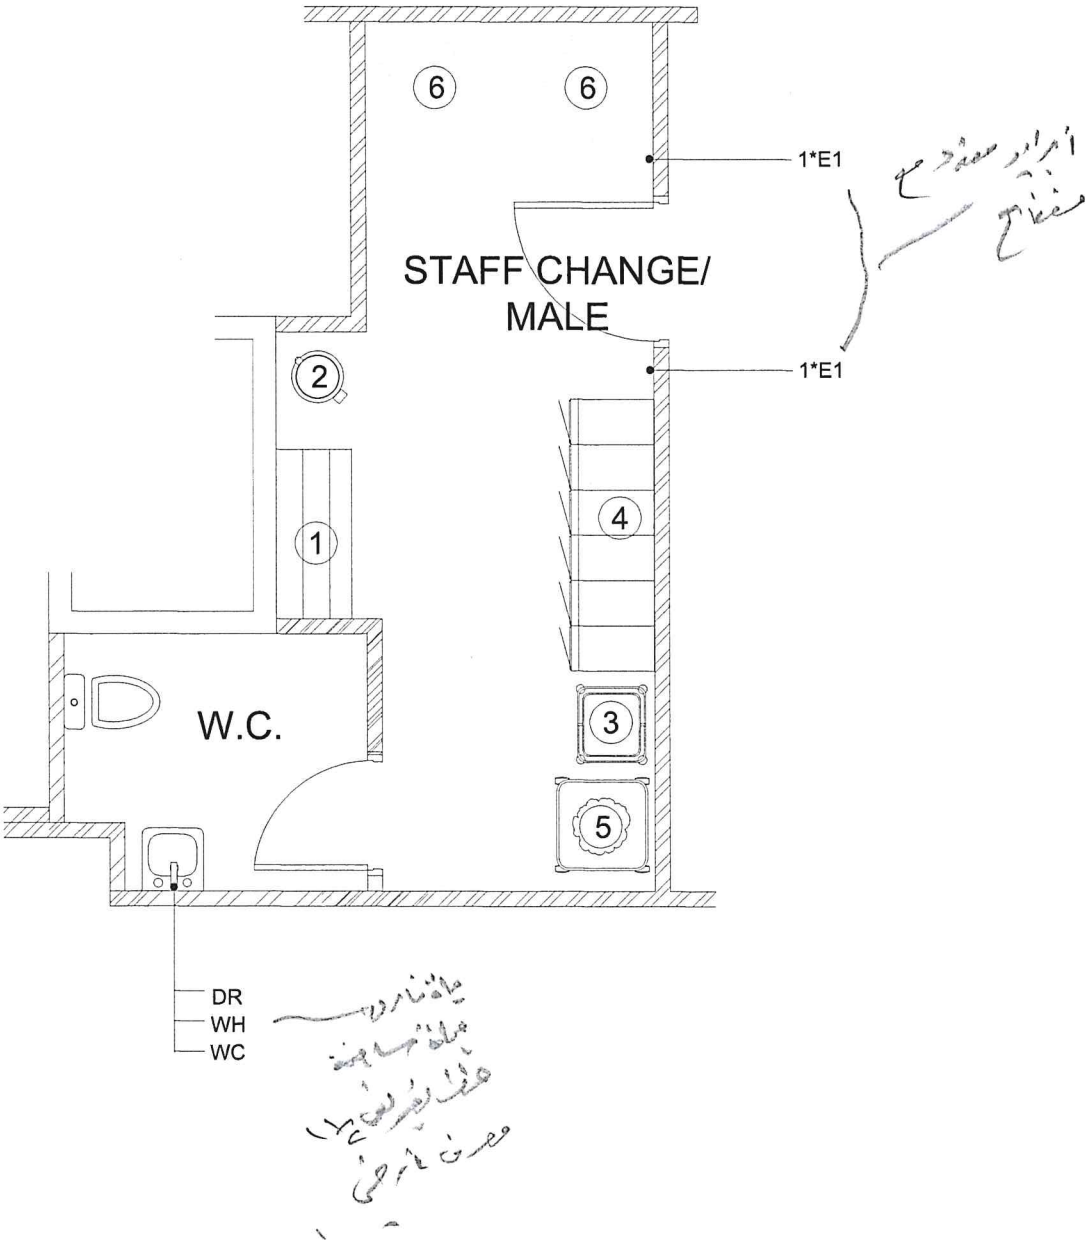

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- STAFF CHANGE/
MALE
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCD-LDD-2ND-DF-5.12

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	(300 lux)
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- ACCOUNTING
FLOOR No. SECOND FLOOR


SCALE:- 1/50

SHEET NUMBER:-
NCD-LDD-2ND-DF-5.13

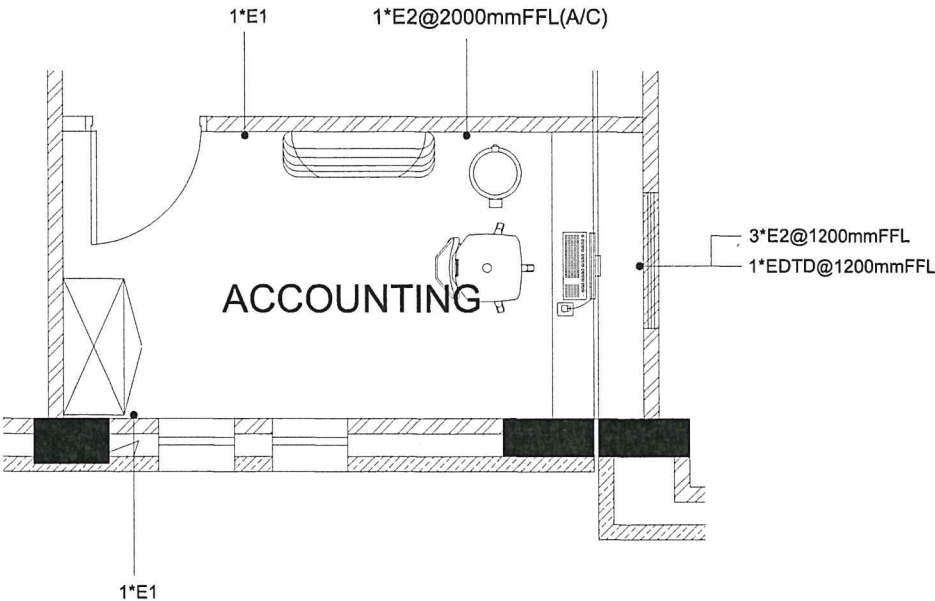

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

HVAC: SPLIT UNIT



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.DTD AIR CH.	---
PRESSURE	---
ILLUMINATION	(300 lux)
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- RECEPTION
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCD-LDD-2ND-DF-5.14

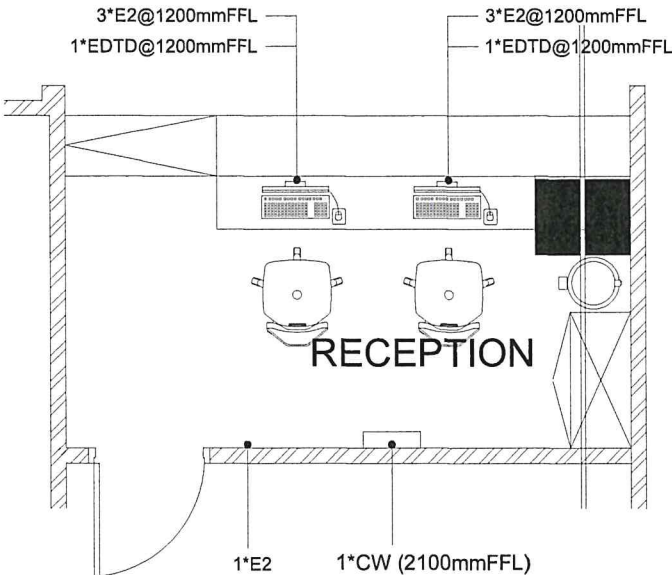

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	(300 lux)
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- H.O.D OFFICE
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-
NCD-LDD-2ND-DF-5.15

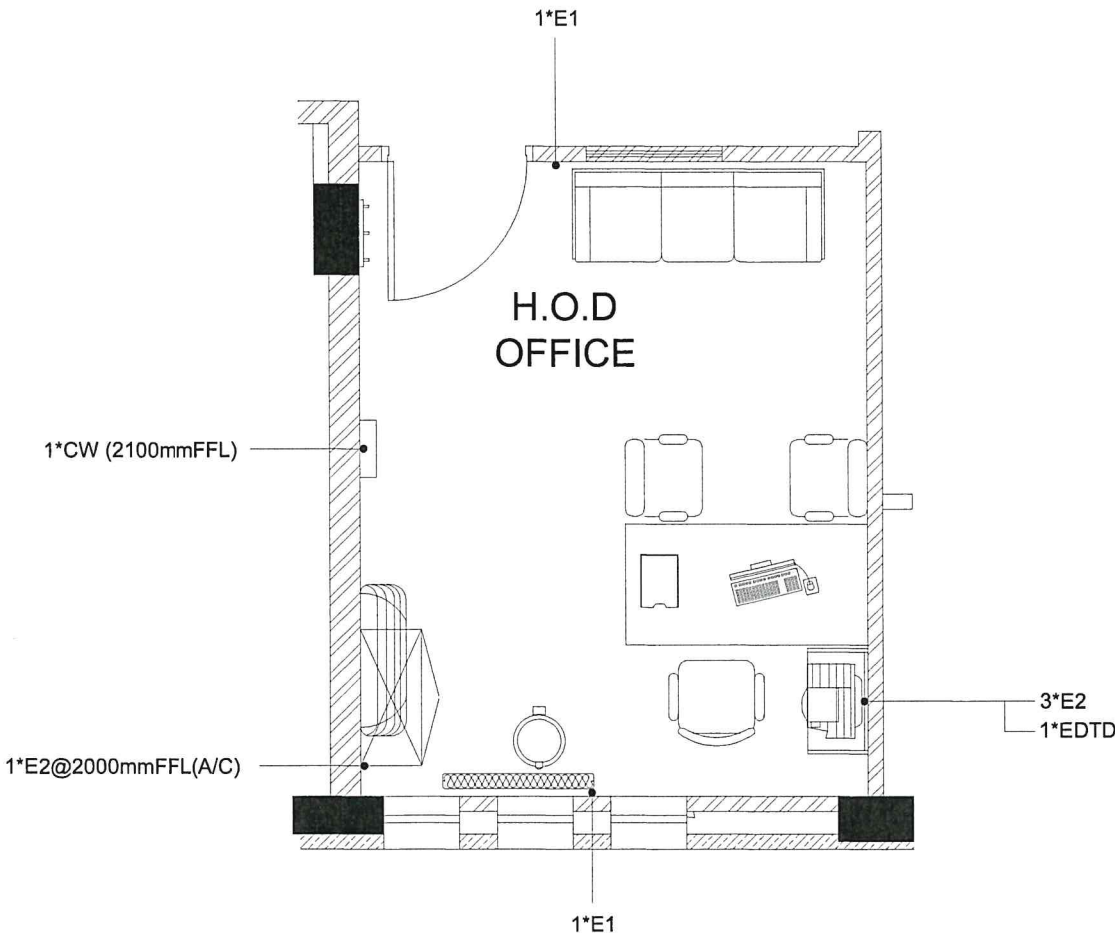

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	CHAIR, ELECTRIC, RECLINER	2
2	BHU, WALL, DIALYSIS, PATIENT	2
3	CABINET, PATIENT, BEDSIDE, DIALYSIS	2
4	CURTAIN, CUBICLE, W/ TRACK	
5	SHARPS, BIN CONTAINER, WALL TYPE	2
6	COUNTER, W/ COMPUTER	1
7	BIN, WASTE, YELLOW, MEDICAL	2
8	BIN, WASTE, BLACK	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.DTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	400 WATTS

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- INTRAVENOUS
INJECTION
FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -
NCD-LDD-2ND-DF-5.16

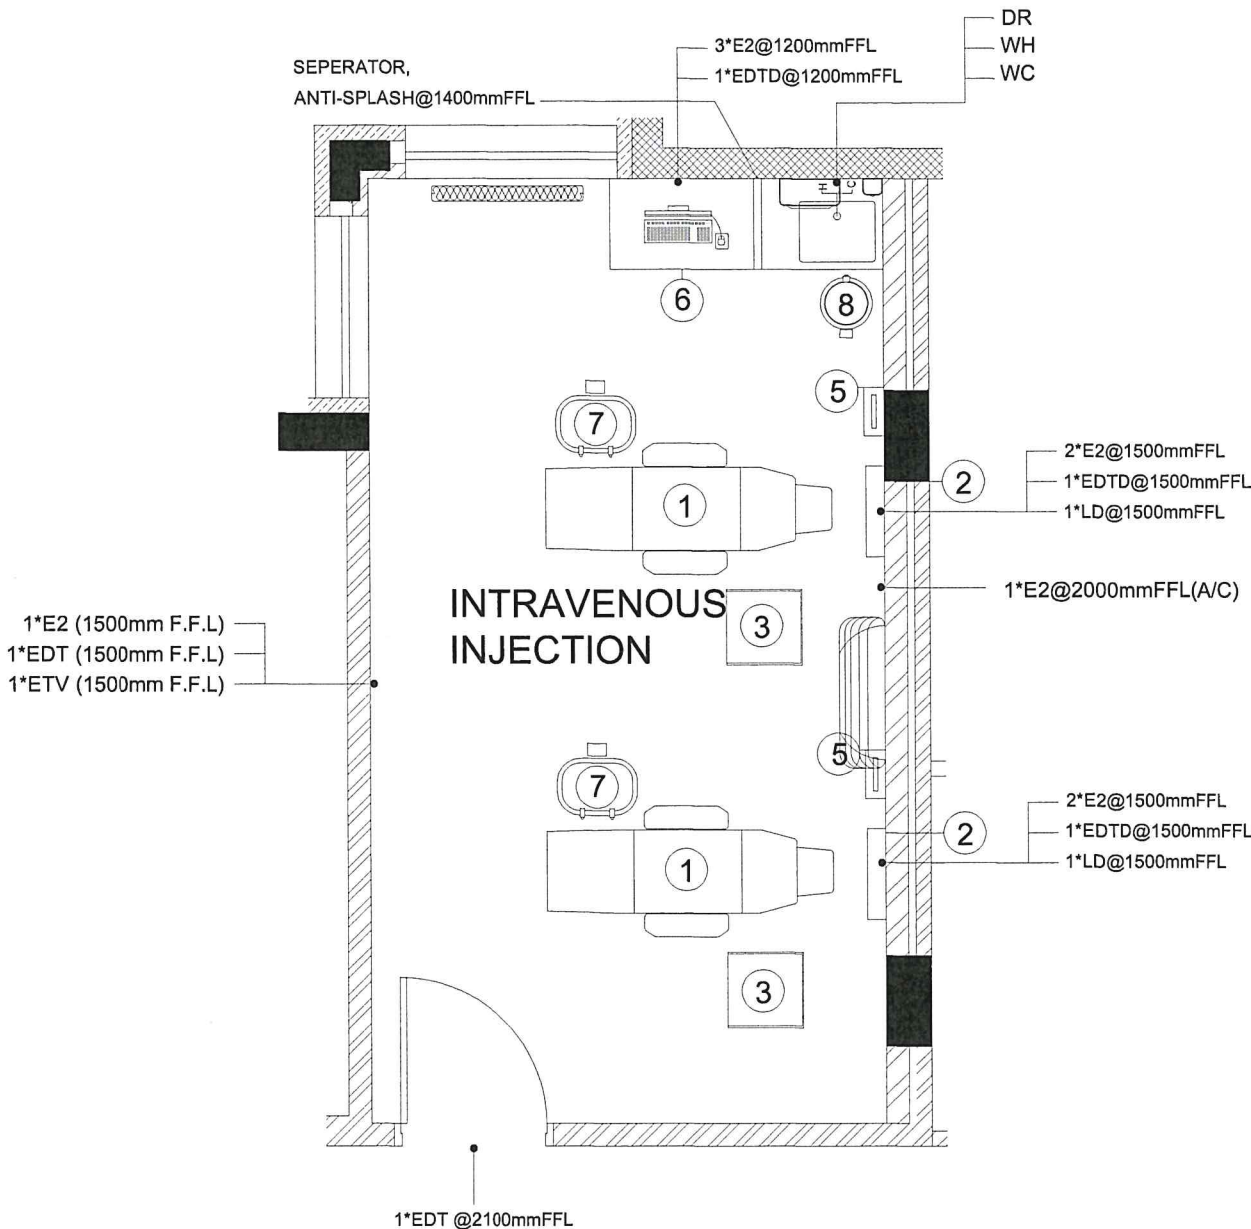


- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	COUCH	1
2	ULTRASOUND	1
3	CABINET, STORAGE	1
4	CABINET, FLOOR-MOUNT, W/SINK	1
5	TEPCO2 UNIT/ MONITOR	1
6	STOOL	1
7	BIN, WASTE, BLACK	1
8	CHAIR, OFFICE	1
9	DESK, W/ COMPUTER, PC	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

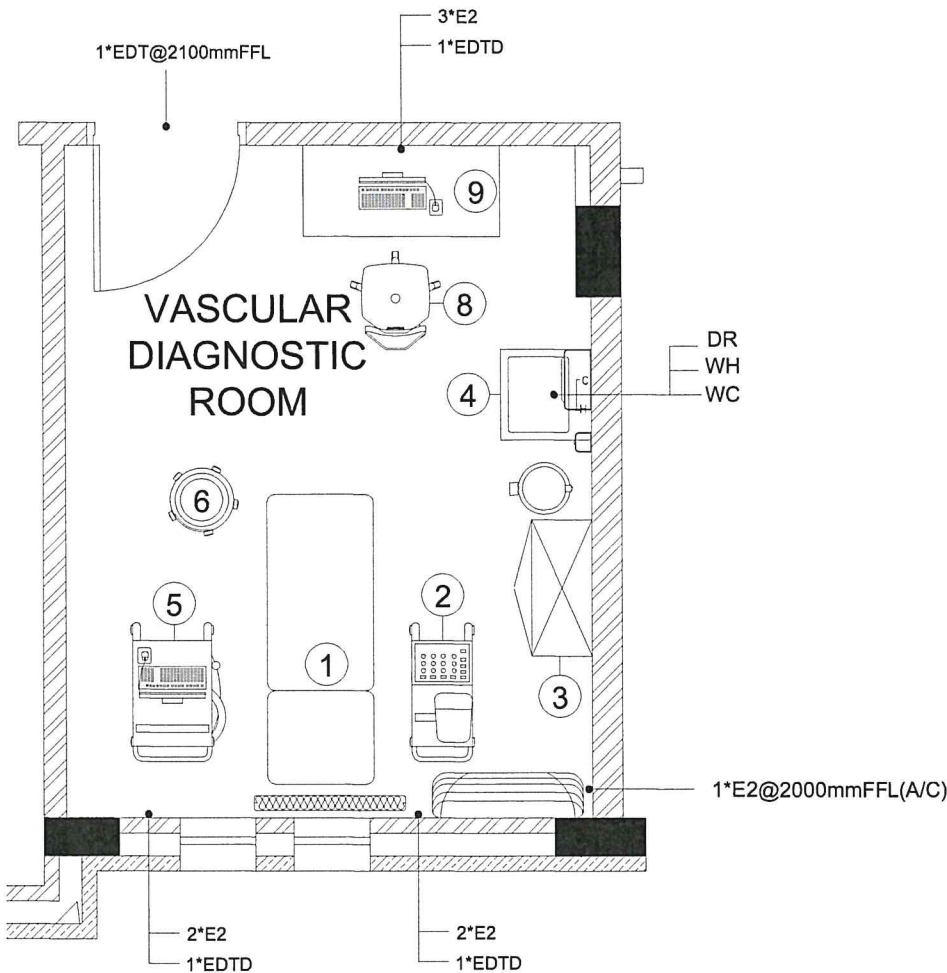

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- VASCULAR
DIAGNOSTIC ROOM
FLOOR No. SECOND FLOOR

SCALE:- 1/50


SHEET NUMBER:-
NCD-LDD-2ND-DF-5.17

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LDC	EQUIPMENT/ ITEM	QTY
1	DIABETIC FOOT UNIT	1
2	CABINET, BUILT-IN, SINK	1
3	CABINET, DOUBLE DOOR, STORAGE	1
4	DESK, W/ COMPUTER, PC	1
5	BIN, WASTE, YELLOW	1
6	BIN, WASTE, BLACK	2
7	CHAIR, OFFICE	1
8	ILLUMINATOR, X-RAY, SINGLE	1
9	STOOL, STAFF, WORKING	1
10	SHARPS, BIN CONTAINER, WALL TYPE	1
11	MONITOR, BLOOD PRESSURE, MOBILE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

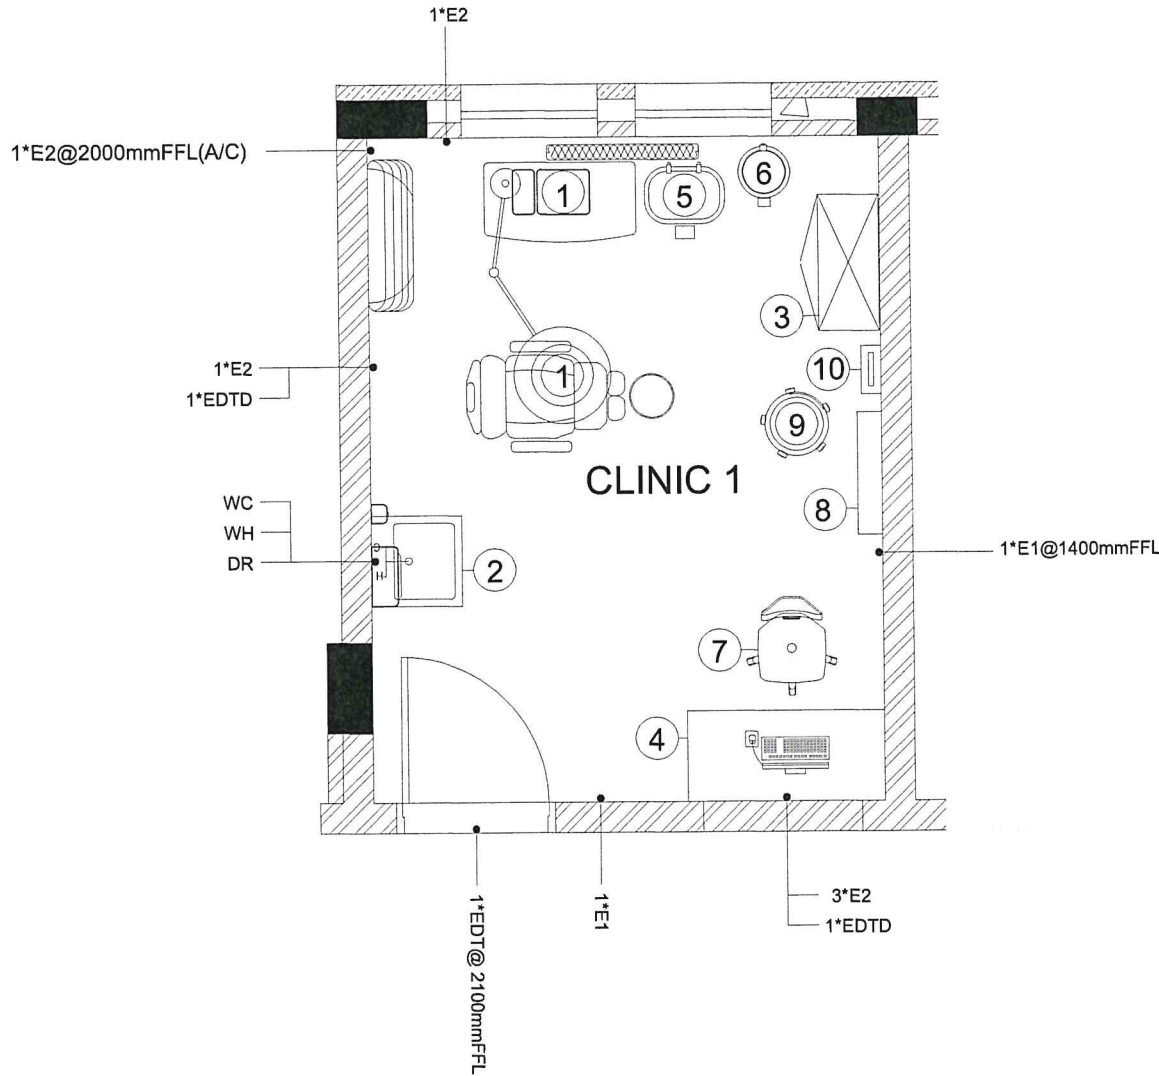

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	400 WATTS

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- CLINIC 1
FLOOR No. SECOND FLOOR

SCALE: - 1/50


SHEET NUMBER: -
NCD-LDD-2ND-DF-5.18

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	DIABETIC FOOT UNIT	1
2	CABINET, BUILT-IN, SINK	1
3	CABINET, DOUBLE DOOR, STORAGE	1
4	DESK, W/ COMPUTER, PC	1
5	BIN, WASTE, YELLOW	1
6	BIN, WASTE, BLACK	2
7	CHAIR, OFFICE	1
8	ILLUMINATOR, X-RAY, SINGLE	1
9	STOOL, STAFF, WORKING	1
10	SHARPS, BIN CONTAINER, WALL TYPE	1
11	MONITOR, BLOOD PRESSURE, MOBILE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BOD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

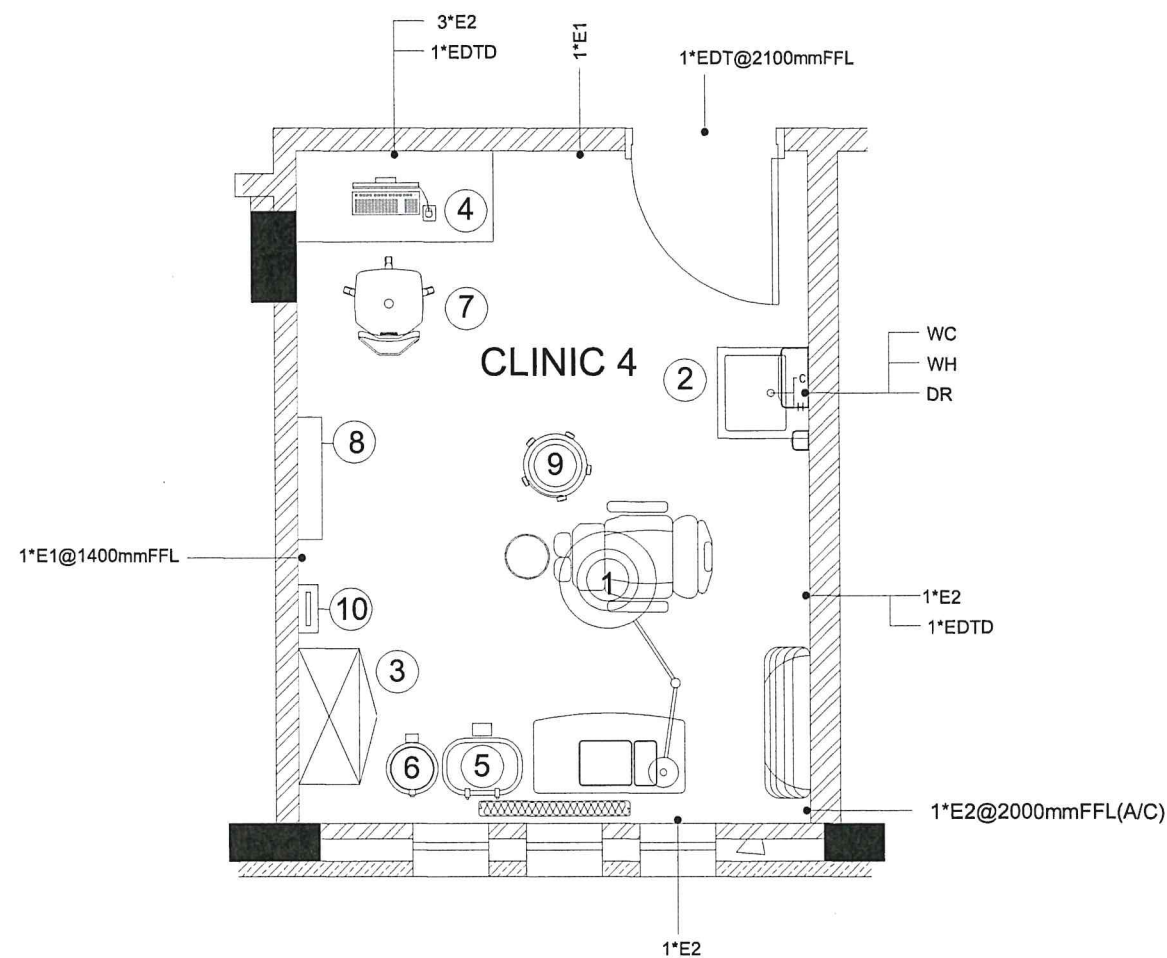

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	400 WATTS

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- CLINIC 4

FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -


NCD-LDD-2ND-DF-5.19

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	DIABETIC FOOT UNIT	1
2	CABINET, BUILT-IN, SINK	1
3	CABINET, DOUBLE DOOR, STORAGE	1
4	DESK, W/ COMPUTER, PC	1
5	BIN, WASTE, YELLOW	1
6	BIN, WASTE, BLACK	2
7	CHAIR, OFFICE	1
8	ILLUMINATOR, X-RAY, SINGLE	1
9	STOOL, STAFF, WORKING	1
10	SHARPS, BIN CONTAINER, WALL TYPE	1
11	MONITOR, BLOOD PRESSURE, MOBILE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

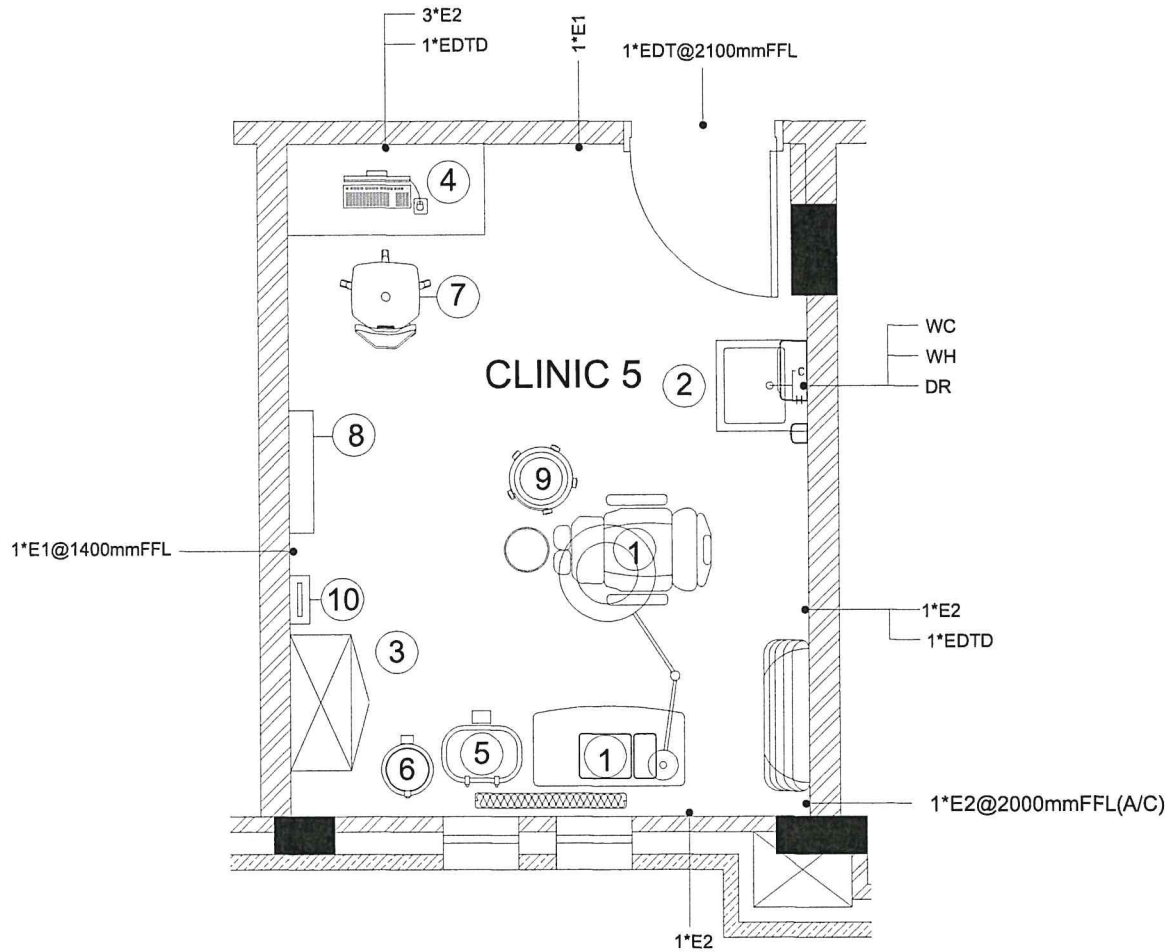

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	400 WATTS

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- CLINIC 5

FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-


NCD-LDD-2ND-DF-5.20

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	DIABETIC FOOT UNIT	1
2	CABINET, BUILT-IN, SINK	1
3	CABINET, DOUBLE DOOR, STORAGE	1
4	DESK, W/ COMPUTER, PC	1
5	BIN, WASTE, YELLOW	1
6	BIN, WASTE, BLACK	2
7	CHAIR, OFFICE	1
8	ILLUMINATOR, X-RAY, SINGLE	1
9	STOOL, STAFF, WORKING	1
10	SHARPS, BIN CONTAINER, WALL TYPE	1
11	MONITOR, BLOOD PRESSURE, MOBILE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

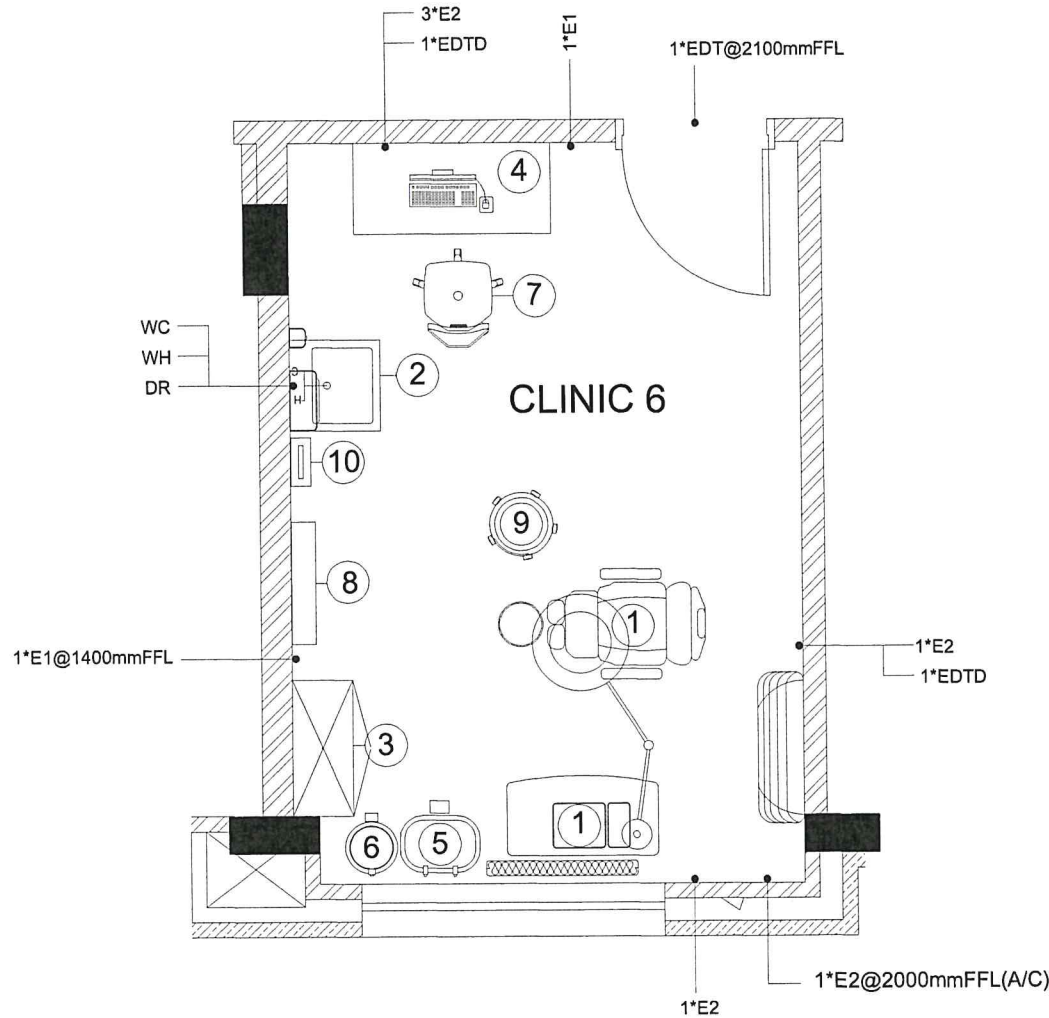

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	400 WATTS

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- CLINIC 6
FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -
NCD-LDD-2ND-DF-5.21

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	CHAIR, ELECTRIC, RECLINER	2
2	BHU, WALL	2
3	CABINET, PATIENT	2
4	CURTAIN, CUBICLE, W/ TRACK	2
5	SHARPS, BIN CONTAINER, WALL TYPE	2
6	CABINET, FLOOR-MOUNT, W/SINK, SS	1
7	COUNTER, W/ COMPUTER	1
8	CHAIR, OFFICE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.DTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	400 WATTS

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- COMPRESSION
THERAPY CLINIC
FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -
NCD-LDD-2ND-DF-5.22

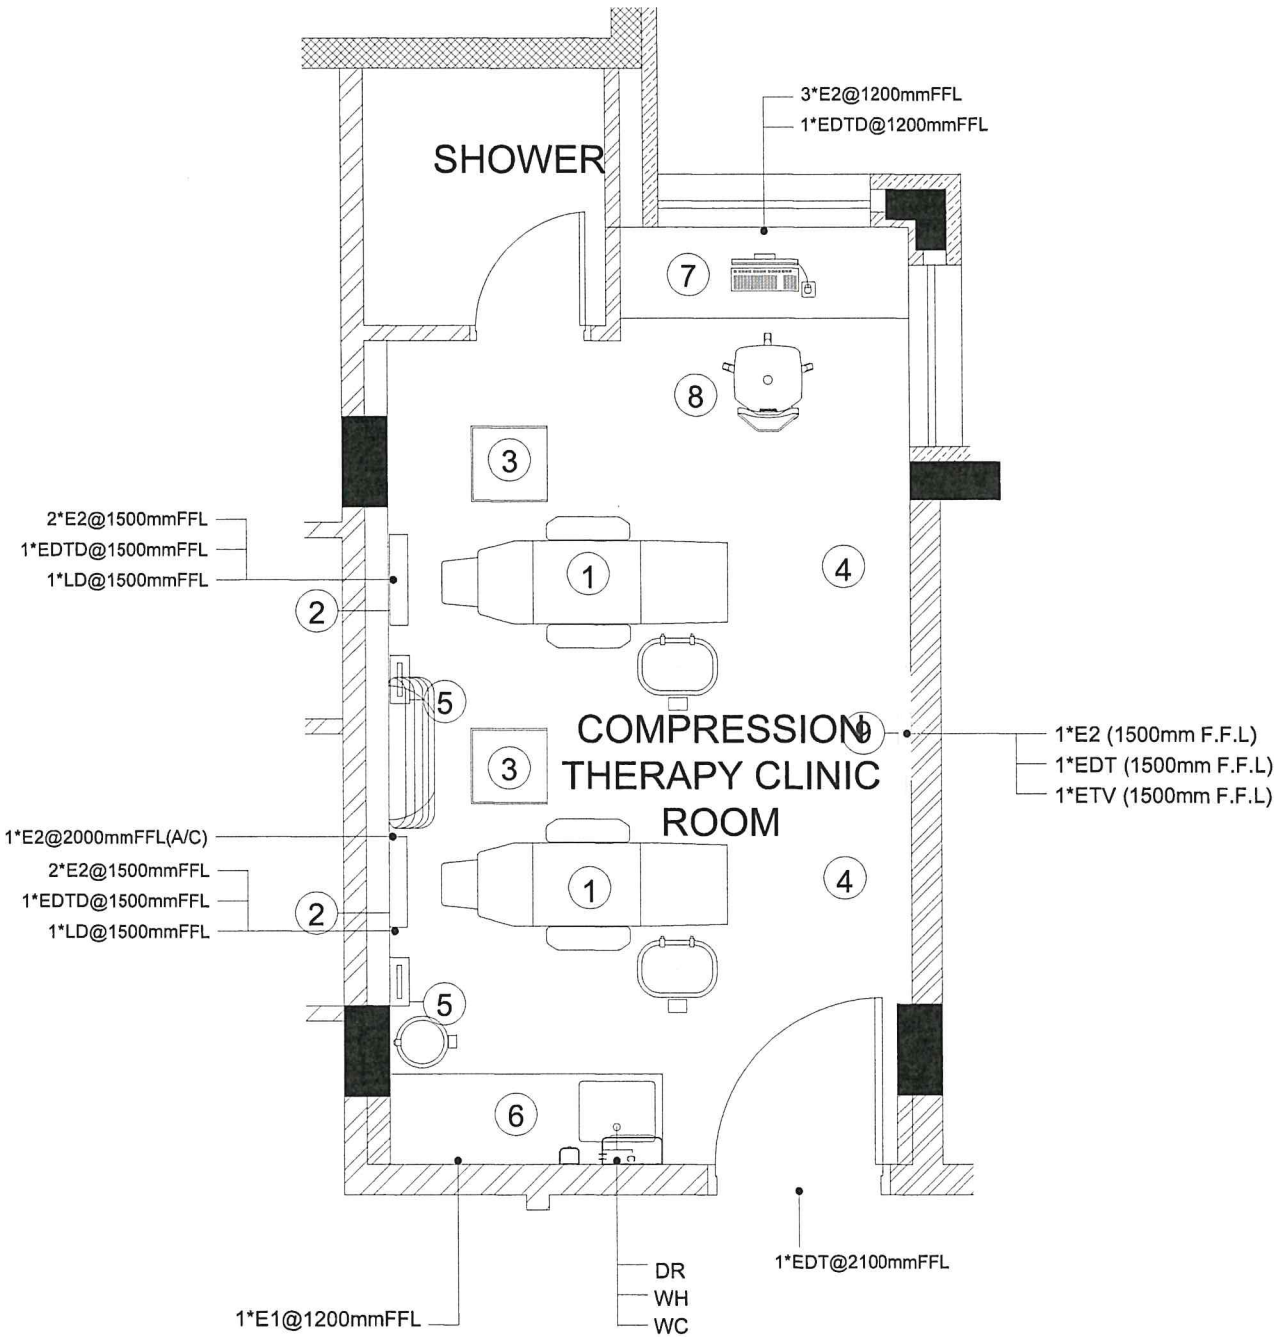


- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

MEDICAL EQUIPMENT LIST

ITEM CODE	NO.	DESCRIPTION	QTY
	1	TABLE, PLASTER	1
	2	LIGHT, CEILING MOUNTED, MINOR, SINGLE	1
	3	TROLLEY PLASTERING, PARIS	1
	4	CABINET, MODULE PER METER, W/ SINK (PLASTERING)	1
	5	BHU, PLASTERING	1
	6	SINK PLASTER	1
	7	CLOCK, WALL MOUNT	1
	8	CLOCK, ELAPSED TIME	1
	9	ILLUMINATION, X-RAY, DOUBLE	1
	10	STOOL ,W/OUT BACK, HEIGHT ADJ,REVOLVE, 5 WHEEL	1
	11	BIN, WASTE, YELLOW	1
	12	SHARPS, BIN CONTAINER, WALL TYPE	1
	13	HOLDER, BINSACK	1
	14	CABINET, CUPBOARD, DOUBLE	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

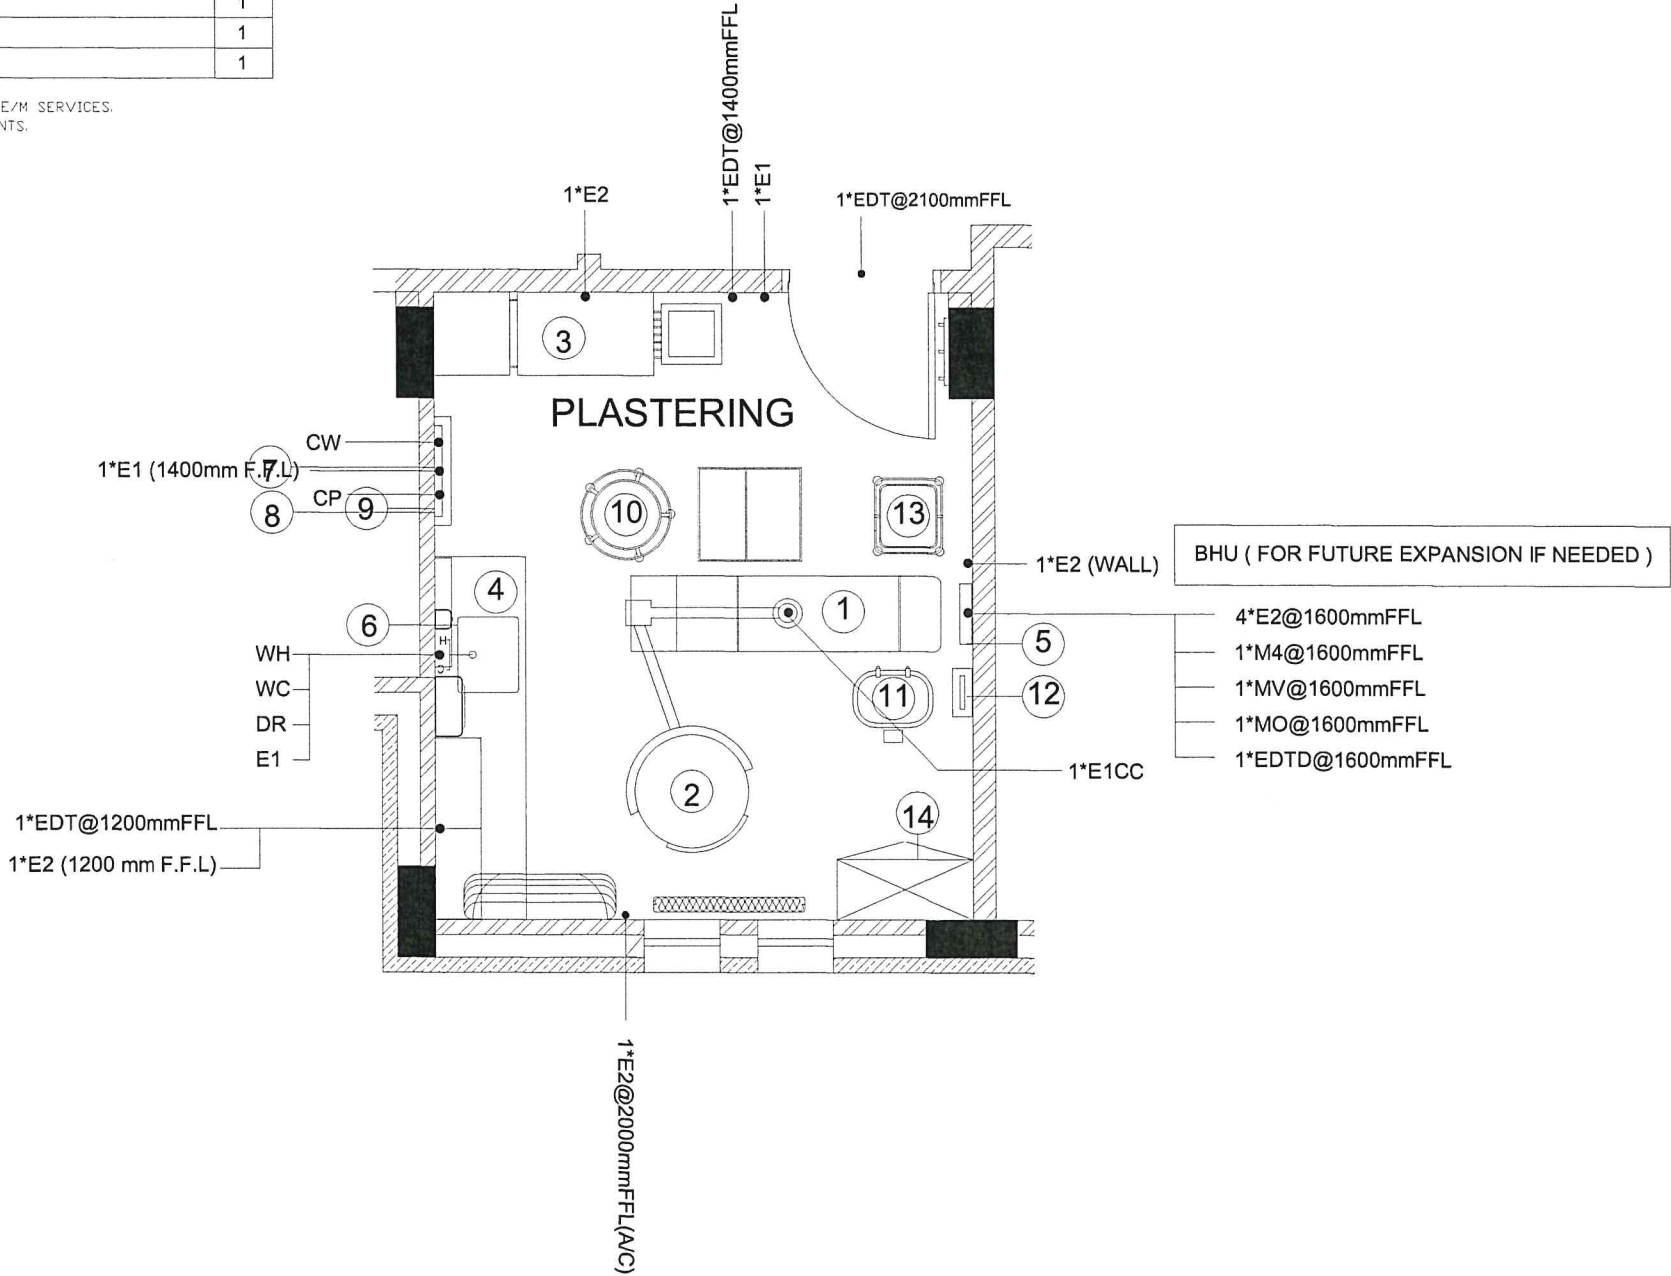

HVAC: SPLIT UNIT



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	500 LUX
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME : - PLASTERING
FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -
NCD-LDD-2ND-DF-5.23

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING

ROOM ENVIRONMENT

ROOM TEMP.	
R.H.	
MIN.TOTAL AIR CH.	
MIN.OTD AIR CH.	
PRESSURE	
ILLUMINATION	
HEAT DISSIPATION	

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- STORE, PLASTERING
FLOOR No. SECOND FLOOR

SCALE: - 1/50

SHEET NUMBER: -
NCD-LDD-2ND-DF-5.24




- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING


MEDICAL EQUIPMENT LIST

LOC	EQUIPMENT/ ITEM	QTY
1	MOB WASH/ HAND WASH, DUAL	3
7	TROLLY	1

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BOO WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

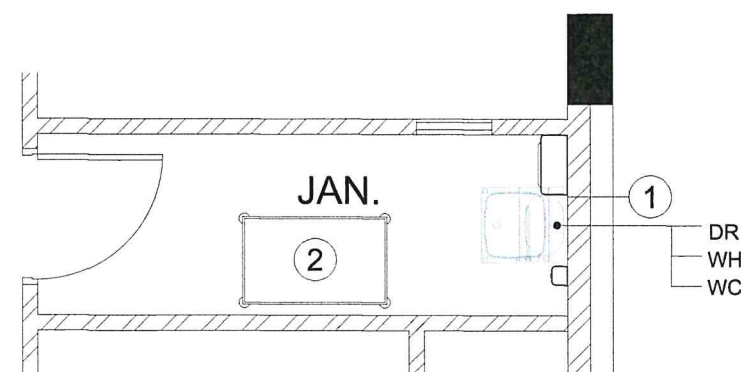

- FLOOR TYPE TO BE PORCELAINE FLOORING
- WALLS TYPE TO BE CERAMIC WALLS



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	
R.H.	
MIN.TOTAL AIR CH.	
MIN.OTD AIR CH.	
PRESSURE	
ILLUMINATION	
HEAT DISSIPATION	

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- JANITOR

FLOOR No. SECOND FLOOR

SCALE: - 1/50


SHEET NUMBER: -

NCD-LDD-2ND-DF-5.25


MEDICAL EQUIPMENT LIST

LDC	EQUIPMENT/ ITEM	QTY
1	BENCH, CHANGE, PER METER	1
2	BIN, WASTE	1
	HOLDER, BINSAC, PEDAL OPERATED,	1
4	LOCKER, CHANGE, FREE STAND, 300MM	10
5	TROLLEY, LINEN, DIRTY, SINGLE	1
6	CHAIR, RECLINER, STAFF	2

- THE ABOVE TABLE CONTENTS SERVE THE PURPOSE OF SPACE AND E/M SERVICES.
- THE ACTUAL BDD WILL BE LISTED IN A SEPARATE TENDER DOCUMENTS.
- SMALL ITEM DO NOT APPEAR ON DRAWING.

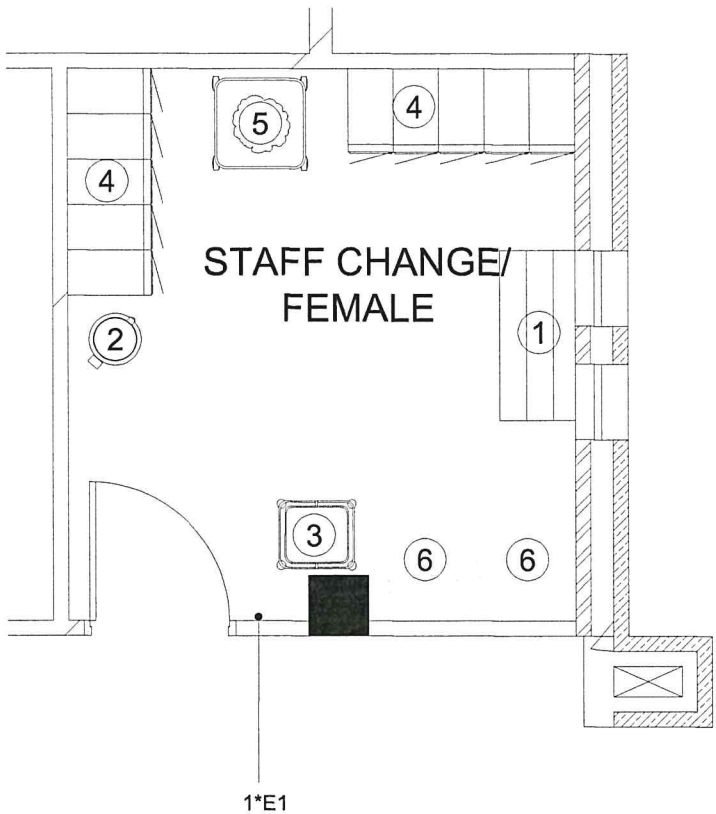

- FLOOR TYPE TO BE PVC FLOORING
- CEILING TYPE TO BE CONSIDERED FALSE CEILING



AL - MASHOURA
For Healthcare Technologies

ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.

DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- STAFF CHANGE/
FEMALE

FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER:-

NCD-LDD-2ND-DF-5.26

(ROOM IS FOR FUTURE EXPANSION IF NEEDED)



ROOM ENVIRONMENT

ROOM TEMP.	---
R.H.	---
MIN.TOTAL AIR CH.	---
MIN.OTD AIR CH.	---
PRESSURE	---
ILLUMINATION	---
HEAT DISSIPATION	---

DATA SHEET SUMMARY/ SERVICES

POWER / UPS	
POWER / GEN	
MED GASES	
DATA / DOUBLE	

EQUIPMENT / ROOM DATA

PROTECTION	
RADIATION	---
SOUND	---
THERMAL	---
NOTES	---
SOURCE	
NURSE CALL	
INTERCOM	
TV.	
TELEPHONE	
CLOCK	
SECURITY	
PA SYSTEM	

MEDICAL PLANNING DESIGN DRAWINGS.
TO PRODUCE SHOP DRAWINGS DURING THE
EARLY CONSTRUCTION PHASE.


DRAWN BY	ENG. ISSA MASWADEH
DRAWN BY	ENG. FARAH TABASHA
CHECKED BY	ENG. IHSAN FARKOUH
DATE	2024/MAY/14
REVISION 1	---

NCDEG - DIABETIC FOOT CLINICS

ROOM NAME :- STORE, GASES
FLOOR No. SECOND FLOOR

SCALE:- 1/50

SHEET NUMBER: -
NCD-LDD-2ND-DF-5.30

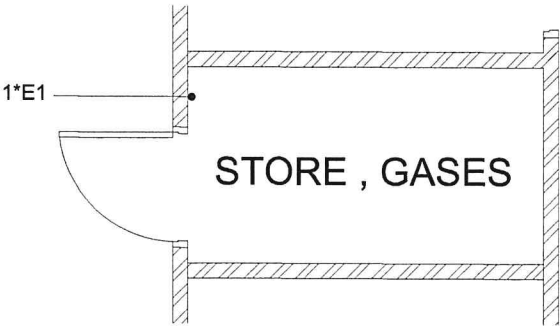

- FLOOR TYPE TO BE PVC FLOORING